

# Introduction to Medical Imaging

## Signal Processing Basics

---

Klaus Mueller

Computer Science Department

Stony Brook University

# Strange Effects

Ever tried to reduce the size of an image and you got this?



We call this effect 'aliasing'

**Better**

But what you really wanted is this:



We call this ‘anti-aliasing’

## Why Is This Happening?

The smaller image resolution cannot represent the image detail captured at the higher resolution

- skipping this small detail leads to these undesired artifacts



# Overview

So how do we get the nice image?

For this you need to understand:

- Fourier theory
- Sampling theory
- Digital filters

Don't be scared, we'll cover these topics gently

# Periodic Signals

A signal is periodic if  $s(t+T) = s(t)$

- we call  $T$  the period of the signal
- if there is no such  $T$  then the signal is aperiodic

Sinusoids are periodic functions

- sinusoids play an important role

Write as:


$$A \sin\left(\frac{2\pi t}{T} + \varphi_t\right)$$

- where  $\varphi_t$  is the phase shift and  $A$  is the amplitude

Alternatively:

$$A \sin(2\pi f t + \varphi_t) = A \sin(\omega t + \varphi_t)$$

- where  $f=1/T$  is the *frequency*
- we may write  $\omega = 2\pi f$

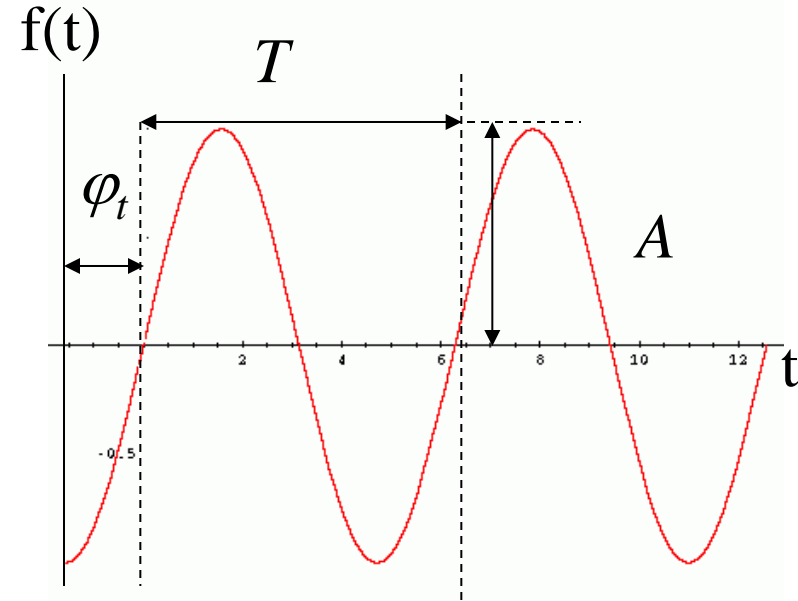

# Fourier Theory

Jean Baptiste Joseph Fourier (1768-1830)

His idea (1807):

- *Any periodic function can be rewritten as a weighted sum of sines and cosines of different frequencies.*

Don't believe it?

- neither did Lagrange, Laplace, Poisson and other major mathematicians of his time
- in fact, the theory was not translated into English until 1878

But it's true!


- it is called the *Fourier Series*



## Example

Consider the function:

$$g(t) = \sin(2\pi f t) + (1/3)\sin(2\pi(3f) t)$$

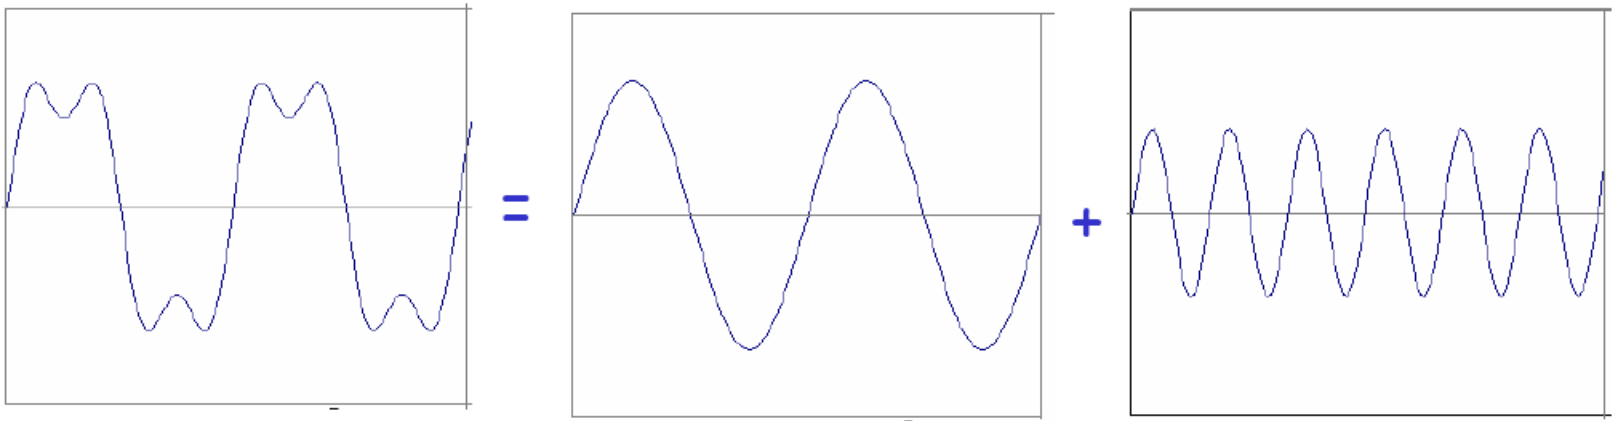




# Frequency Spectrum


Consider the function:

$$g(t) = \sin(2\pi f t) + (1/3)\sin(2\pi(3f) t)$$

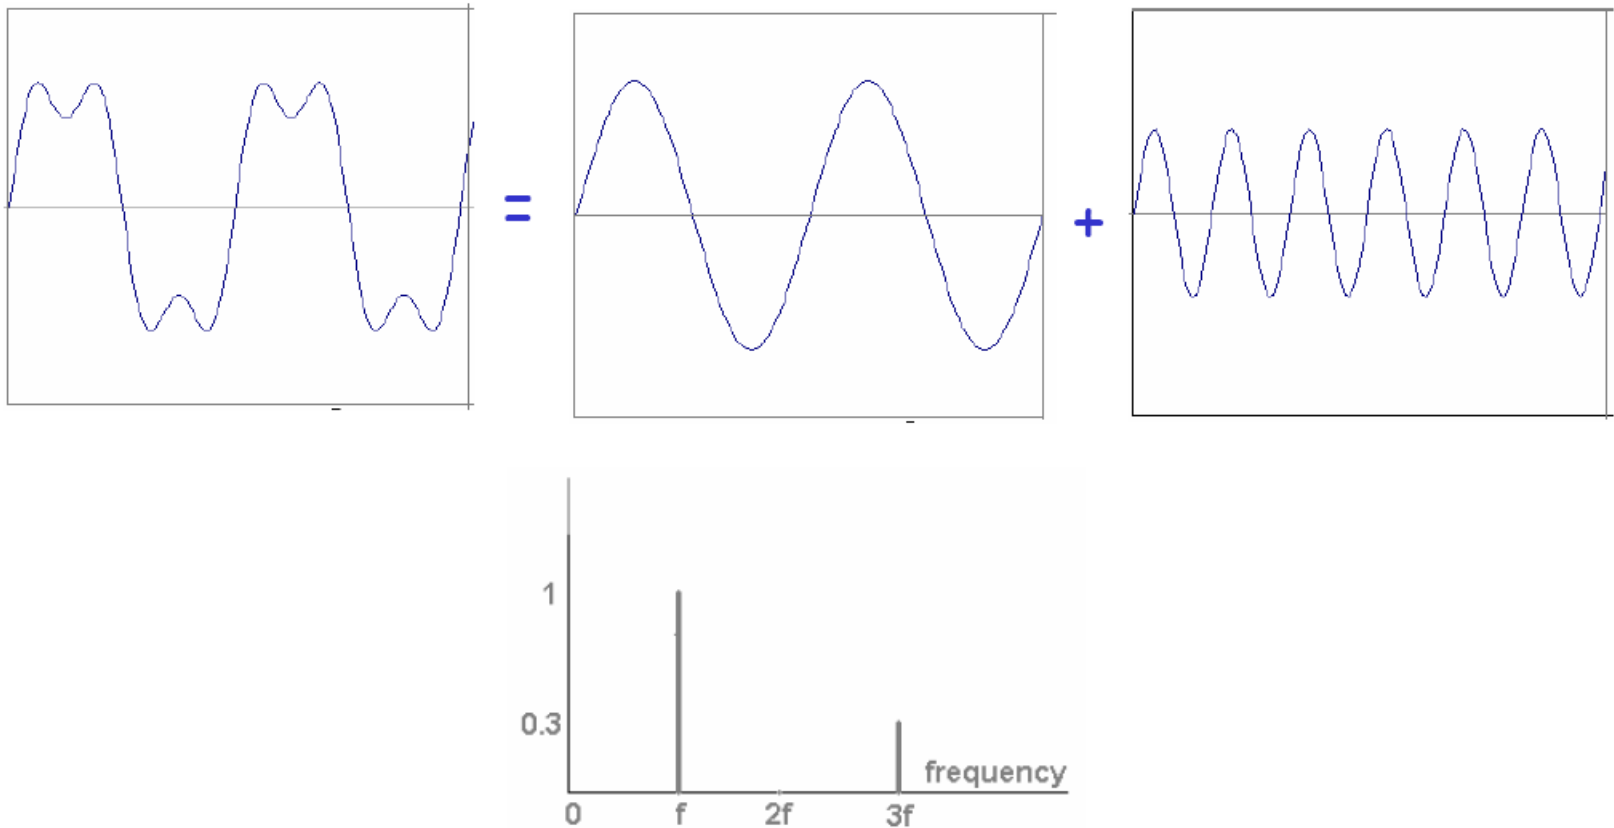


the function's frequency spectrum

## Further Example (1)

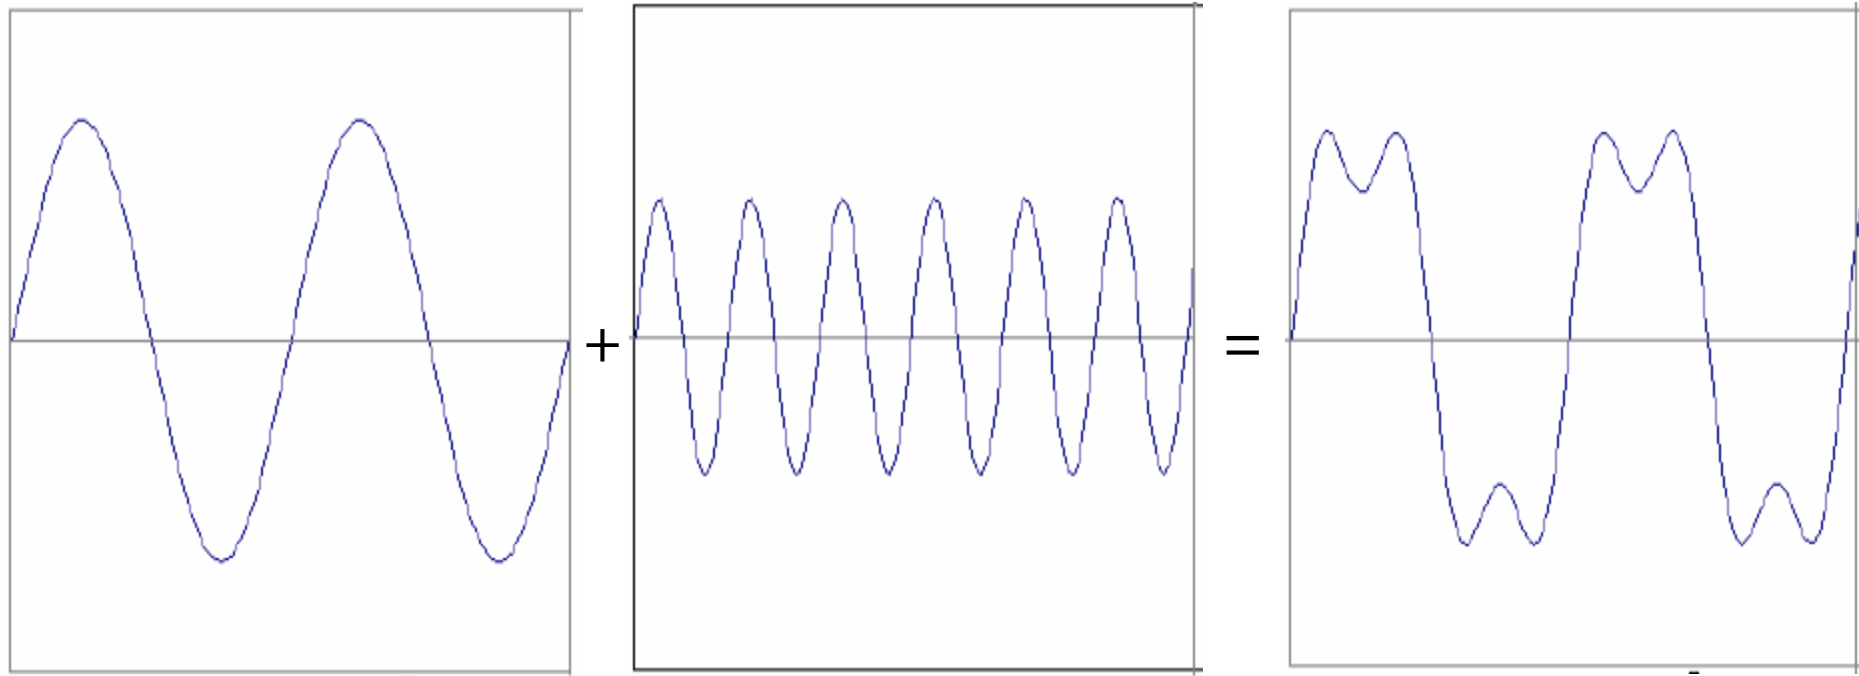


## Further Example (2)

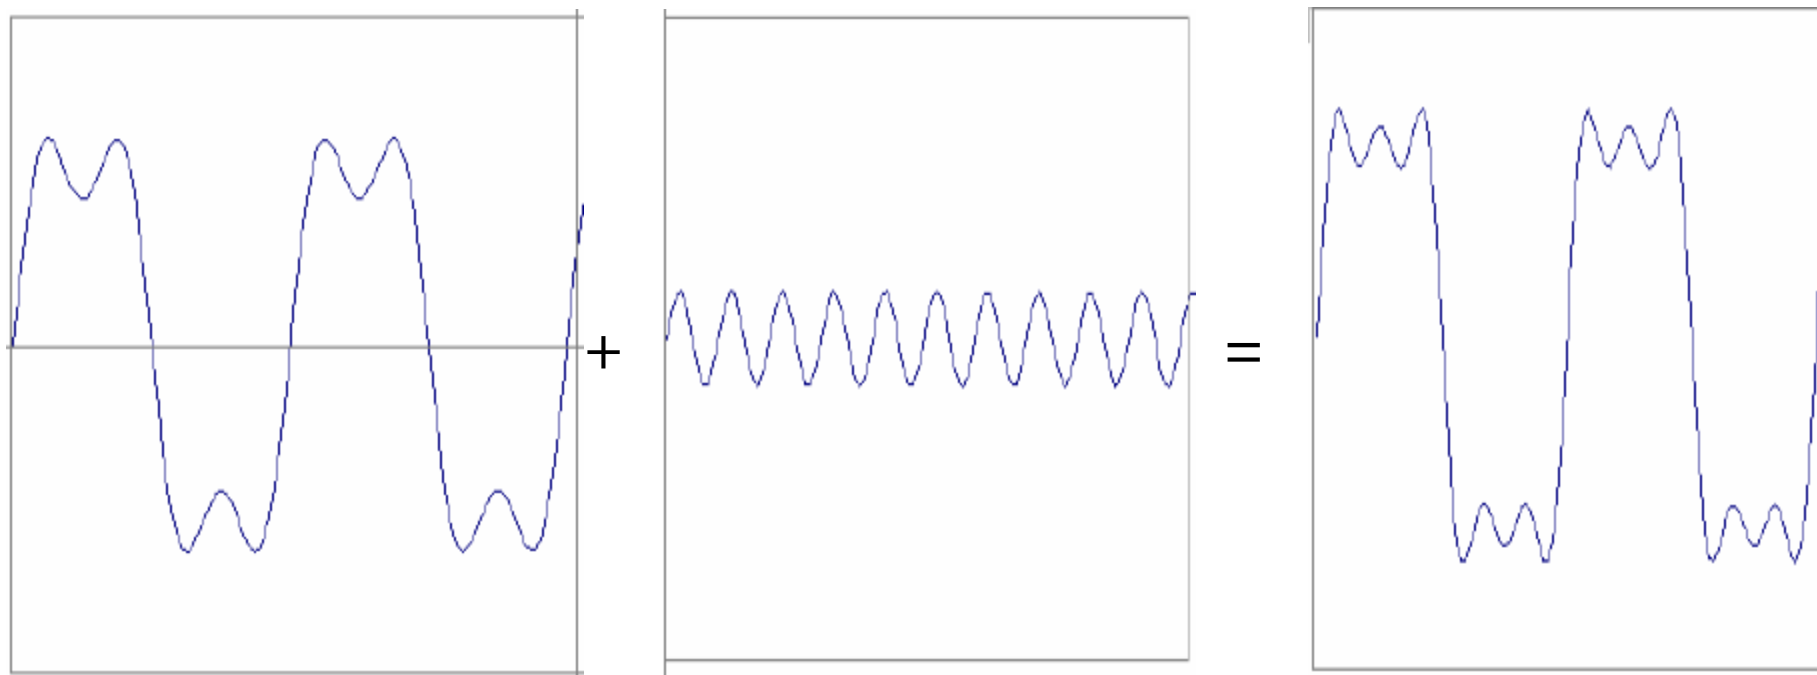


## Further Example (3)




+

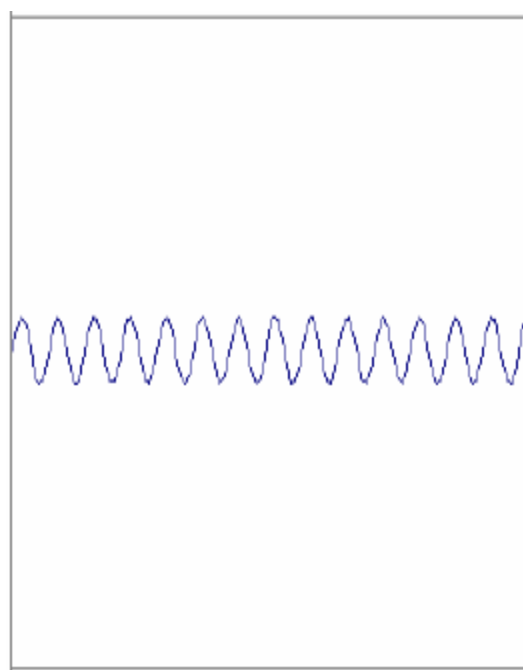

=

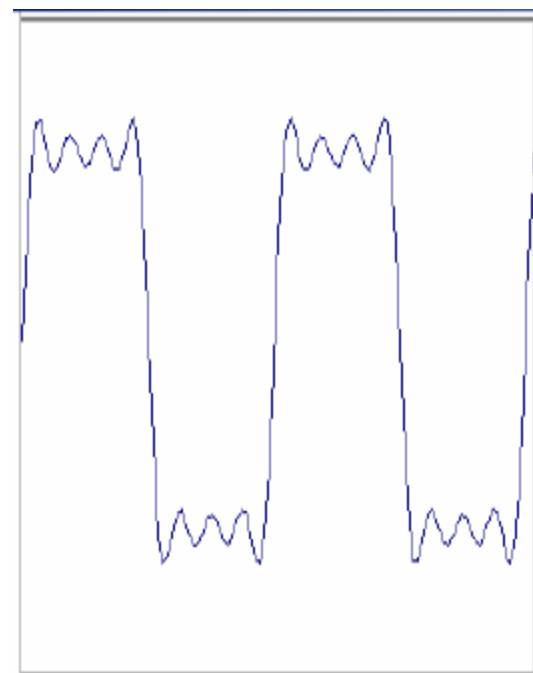


## Further Example (4)

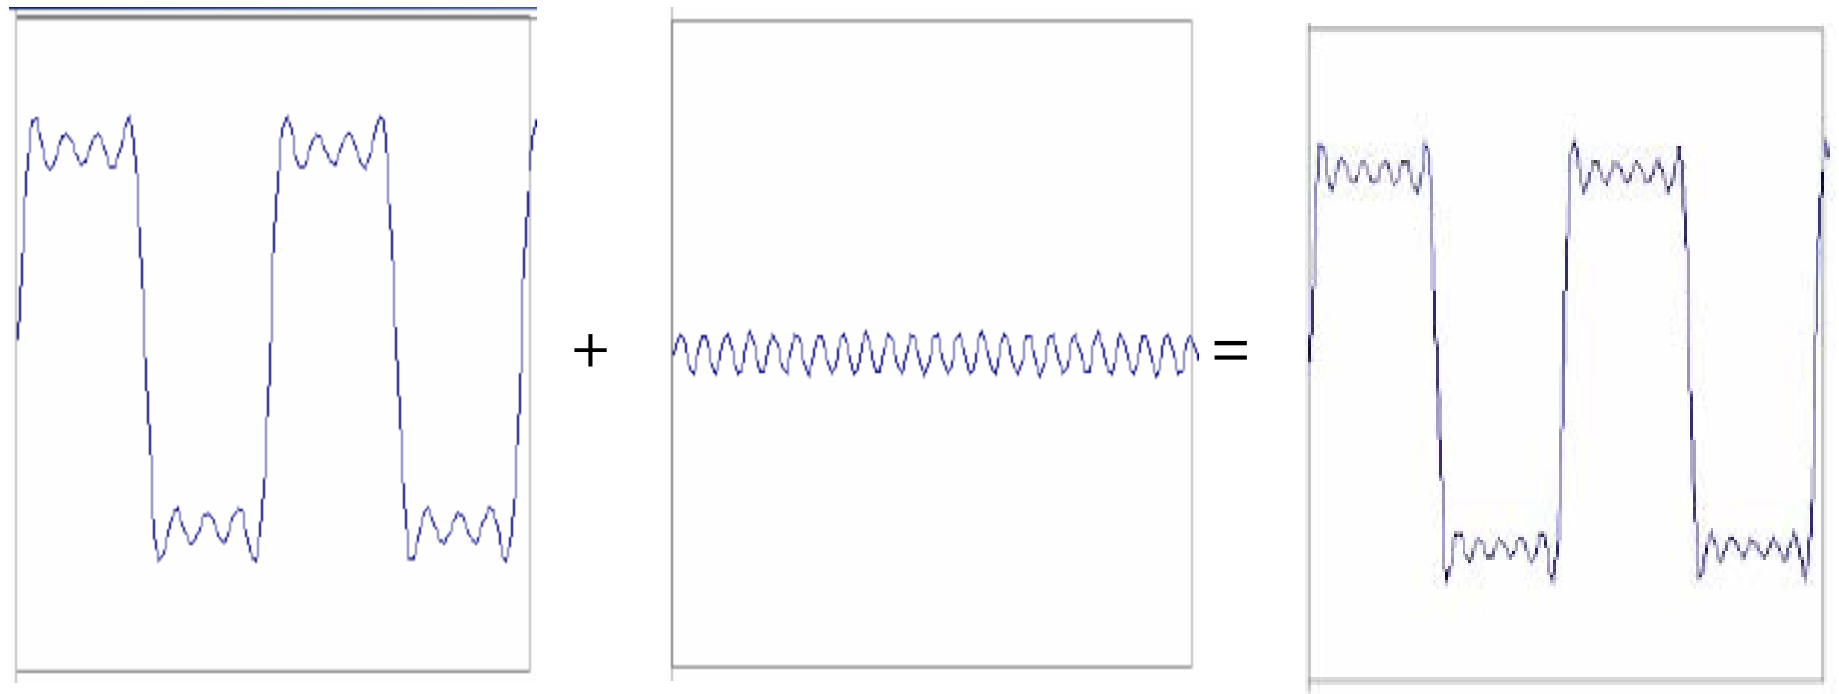


# The Importance of the Frequency Spectrum

We observe:

- oscillations of different frequencies add to form the signal
- there is a characteristic frequency spectrum to any signal
- sharp edges can only be represented (generated) by high frequencies

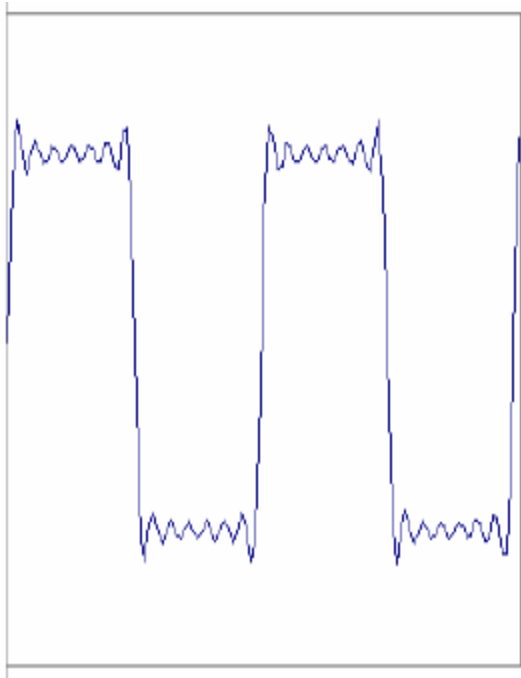



signal  
(approximate square/box function)

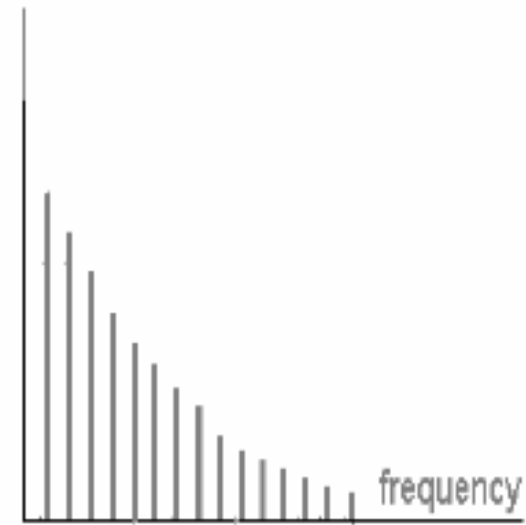

its frequency spectrum

# The DC Component

The first component of the spectrum is the *signal average DC*

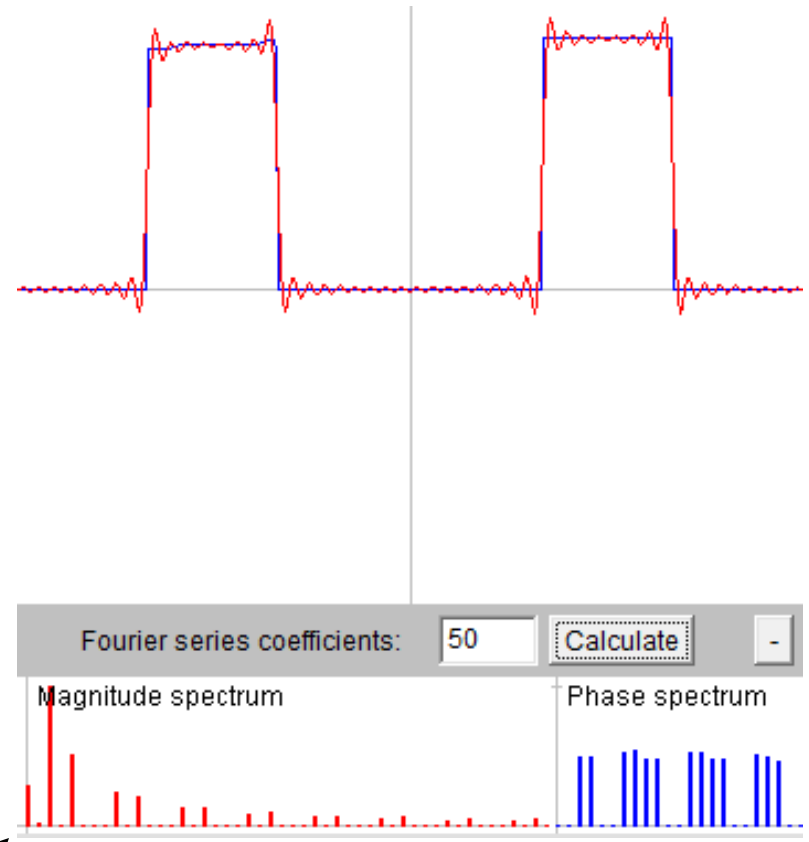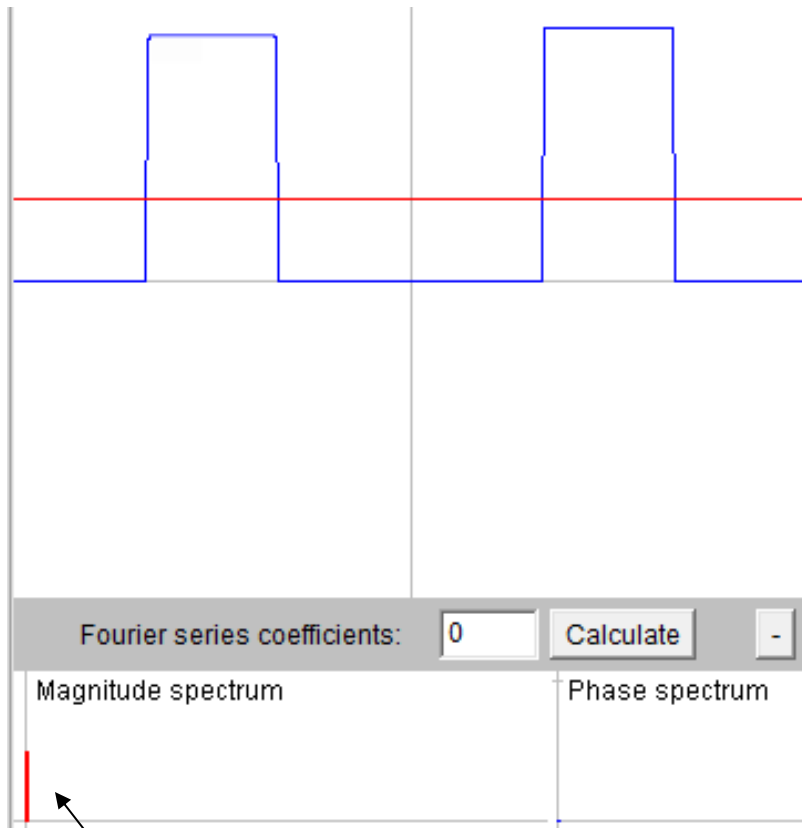

‘DC component’ = signal average

## The Math...

The example just seen has the following Fourier Series:

$$s(t) = \sum_{k=1}^{\infty} \frac{1}{k} \sin(2\pi k t)$$


- most of the time the phase is not interesting, so we shall omit it

In fact, this is an interesting series: the *sinc* function

- we shall see more of it soon

We can convert any discrete signal into its Fourier Series (and back)

- this is called the *Fourier Transform* (*Inverse Fourier Transform*)

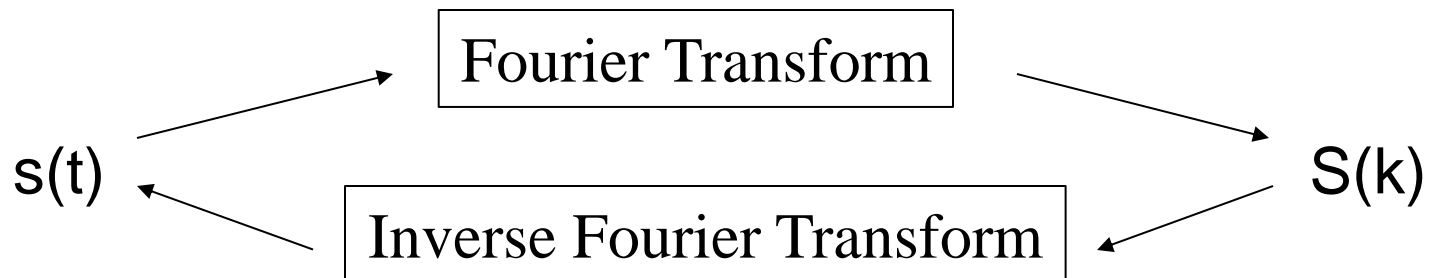




# Fourier Transform of Discrete Signals: DFT

## Discrete Fourier Transform (DFT)

- assumes that the signal is discrete and finite

$$S(k) = \sum_{n=0}^{N-1} s(n) e^{-\frac{i2\pi kn}{N}} \quad s(n) = \frac{1}{N} \sum_{k=0}^{N-1} S(k) e^{\frac{i2\pi kn}{N}}$$

- we have  $N$  samples, from which we can calculate  $N$  frequencies
- the frequency spectrum is discrete and it is periodic in  $N$

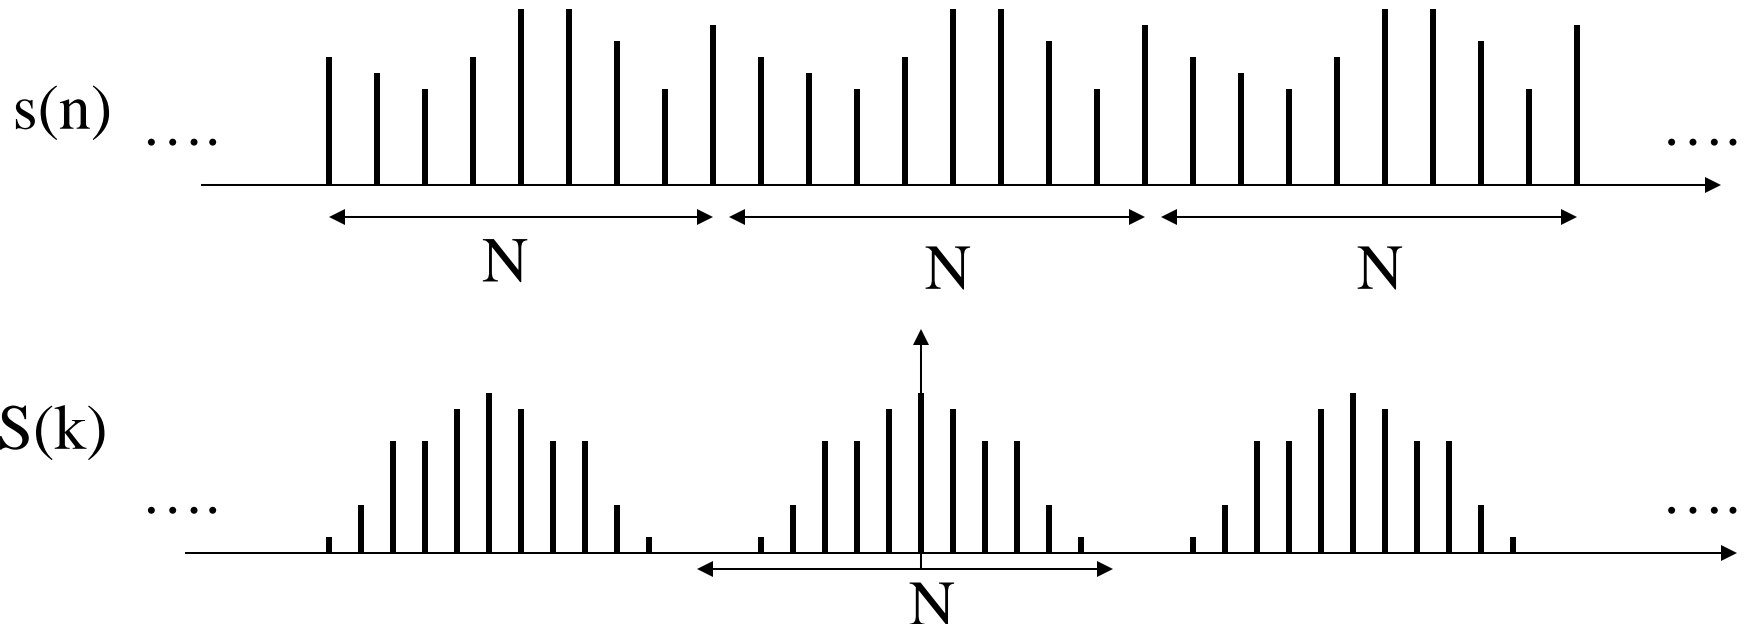

# Periodicity

Images are discrete signals

- so their frequency spectra are finite and periodic (see last slide)
- and therefore they have an upper limit (a maximum frequency)

Images are also finite (in size)

- the DFT assumes that they are also periodic
- as odd as this may sound, this is the underlying assumption

Therefore:

- frequency spectra are finite and periodic
- images are also finite and periodic

Keep this in mind for now

- it will help explain the strange resizing effects presented before

## Now, What About the Complex Exponential...

It is Fourier's way to encode phase and amplitude into one representation

- to understand it better, let's first review complex numbers
- and then see what it means in the Fourier context

Note, we only discuss this to illustrate the full picture

- essential for this class is only to know the concept of frequency spectrum discussed thus far

## Recall: Complex Numbers


A complex number  $c$  has a real and an imaginary part:

- $c = \operatorname{Re}\{c\} + i \operatorname{Im}\{c\}$  (cartesian representation)  $i = \sqrt{-1}$
- here,  $i$  always denotes the complex part

We can also use a polar representation:

$$A_c = \sqrt{\operatorname{Re}\{c\}^2 + \operatorname{Im}\{c\}^2}$$

$$\varphi_c = \tan^{-1}\left(\frac{\operatorname{Im}\{c\}}{\operatorname{Re}\{c\}}\right)$$

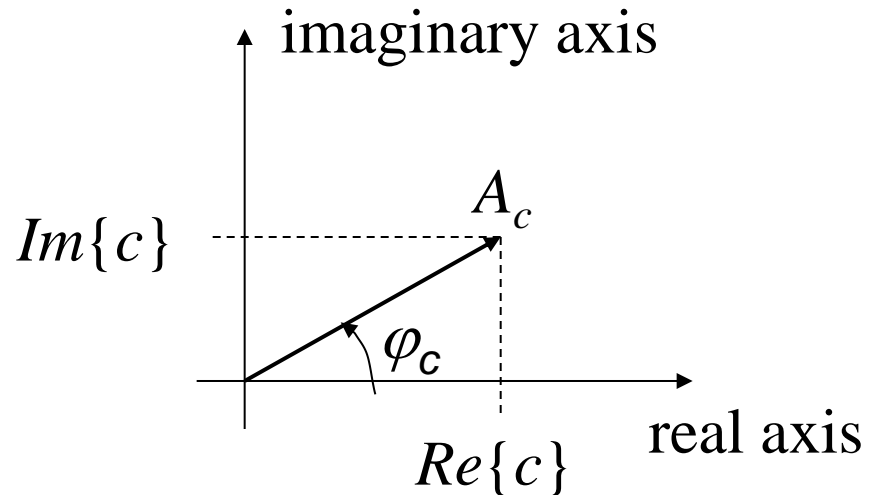


# Application: Complex Sinusoids

## Exponential *exp*

$$\exp(ax) = e^{ax}$$

- when  $a > 0$  then *exp* increases with increasing  $x$
- when  $a < 0$  then *exp* approximates 0 with increasing  $x$

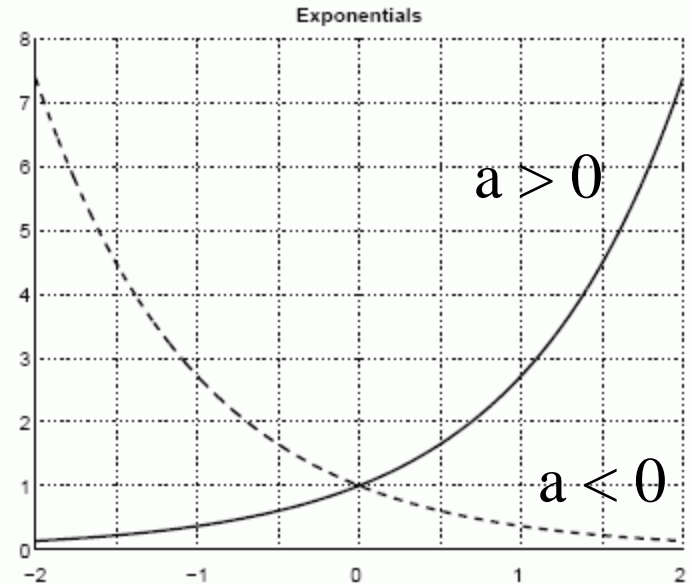


## Complex exponential / sinusoid:


$$A_k e^{i(2\pi kt + \varphi)} = A_k (\cos(2\pi kt + \varphi) + i \sin(2\pi kt + \varphi))$$

## As before



- the *cos* term is the signal's real part
- the *sin* term is the signal's imaginary part
- $A$  is the amplitude,  $\varphi$  the phase shift,  $k$  determines the frequency

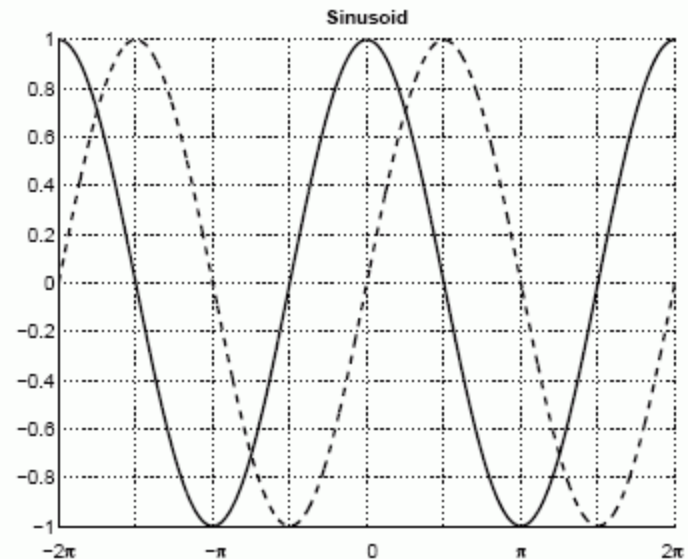

# Two-Dimensional Fourier Spectrum

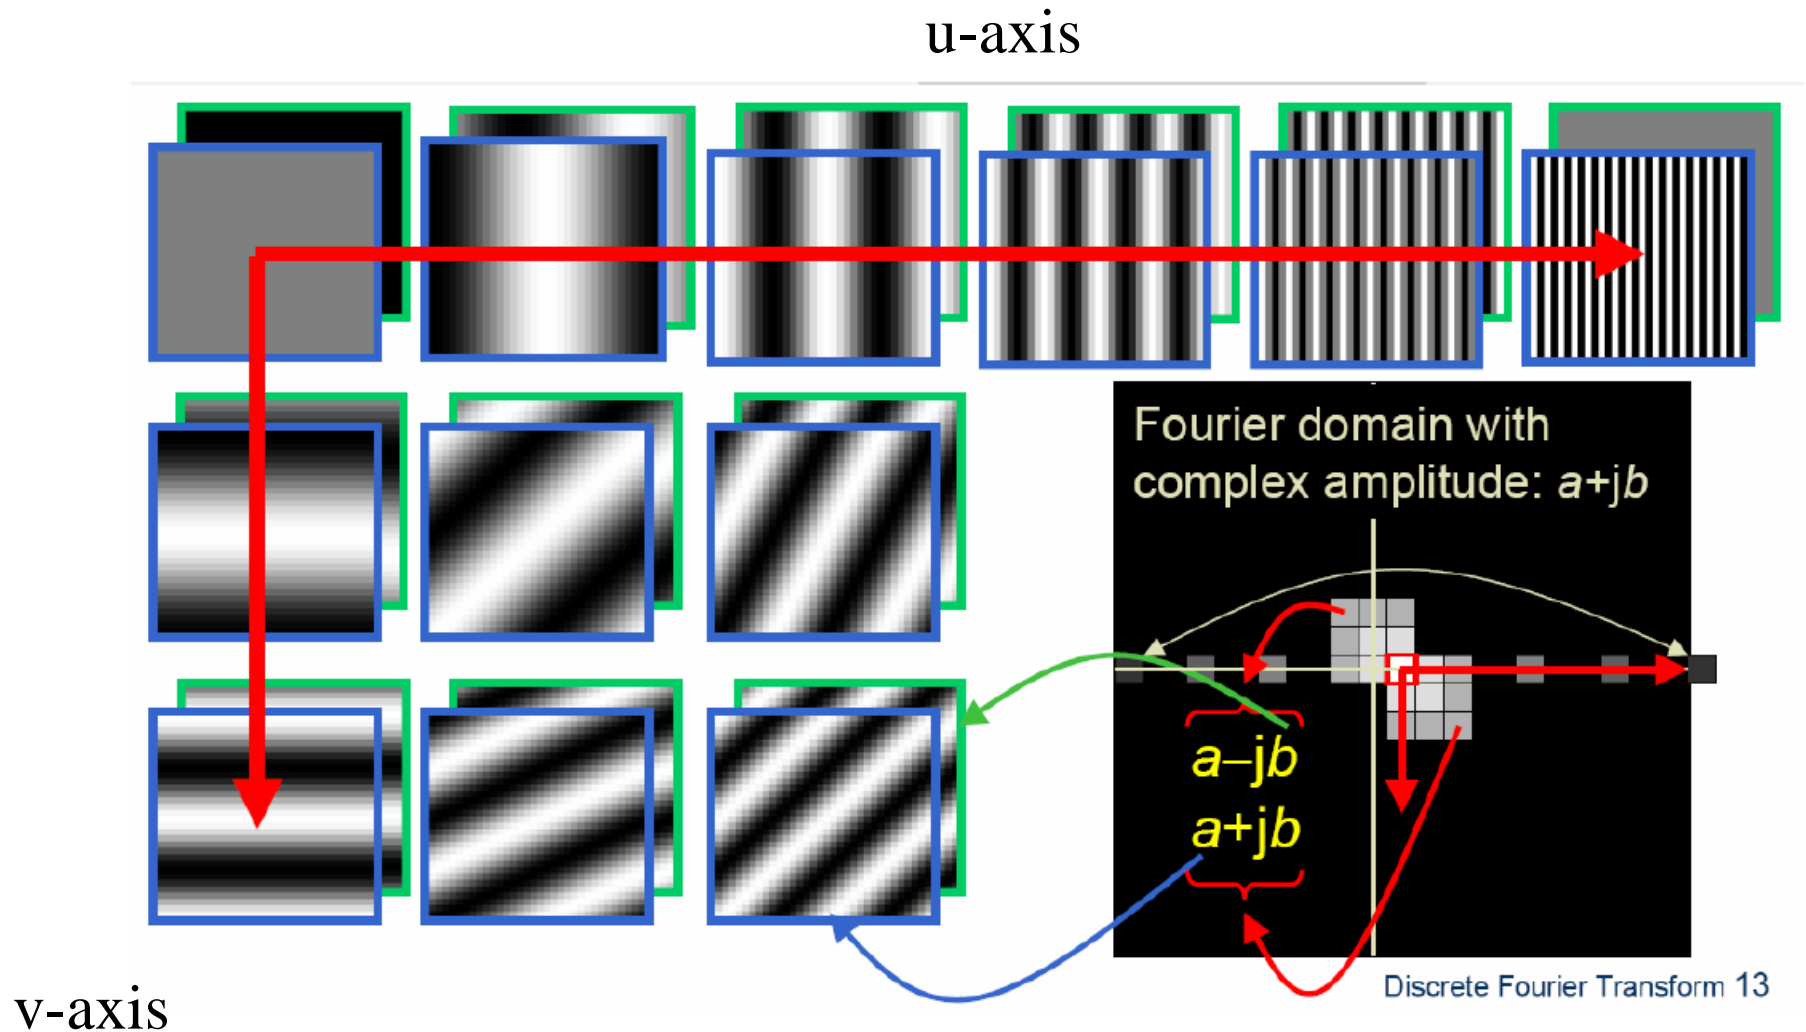

# Some Example Spectra

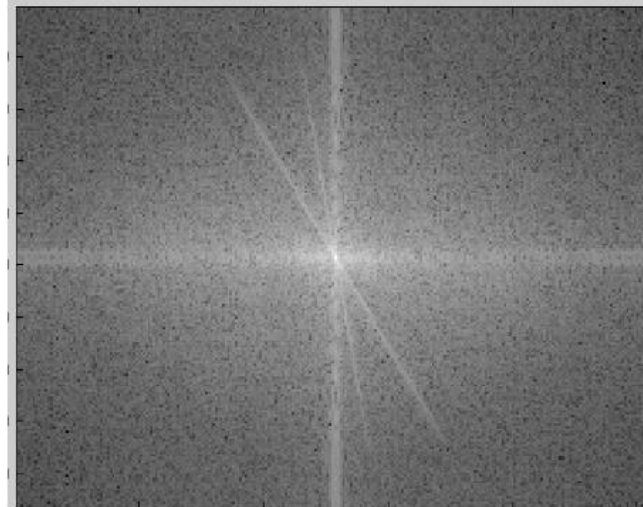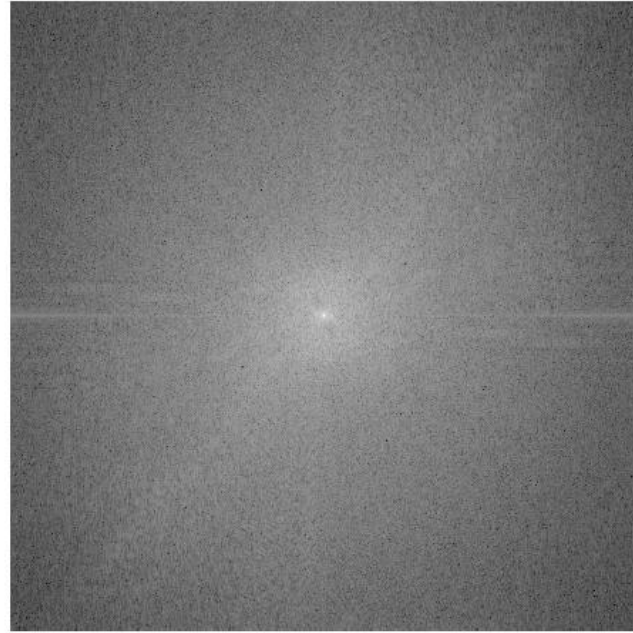




# Effects of Missing Spectra Portions: Axial


(a) Spectrum along  $u$  determines detail along spatial  $x$

(b) Spectrum along  $v$  determines detail along spatial  $y$

(a)

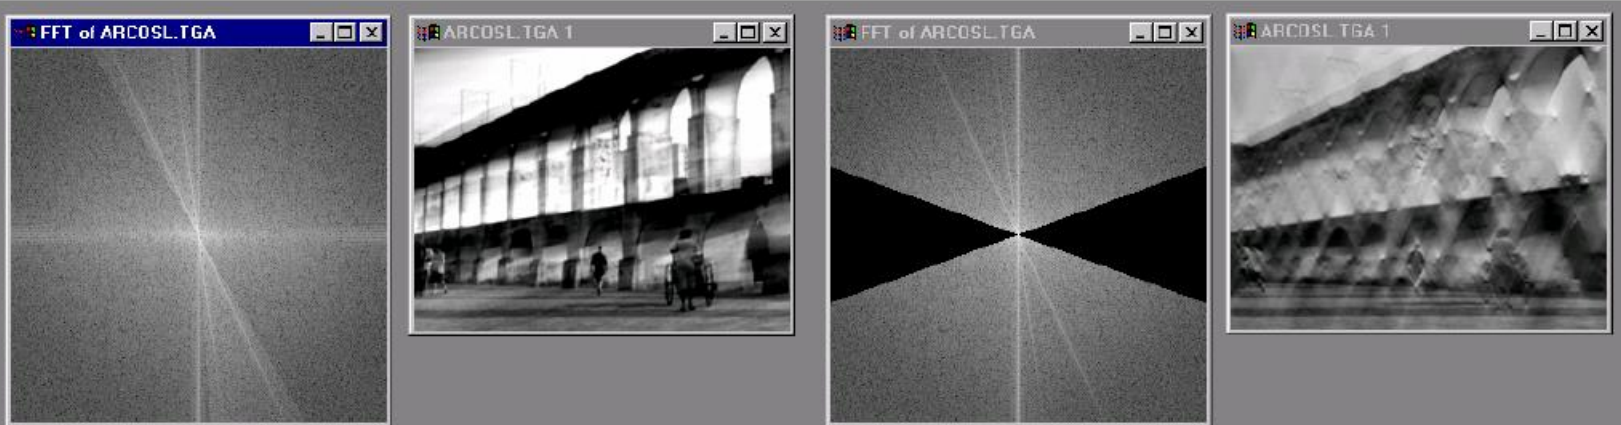

(b)

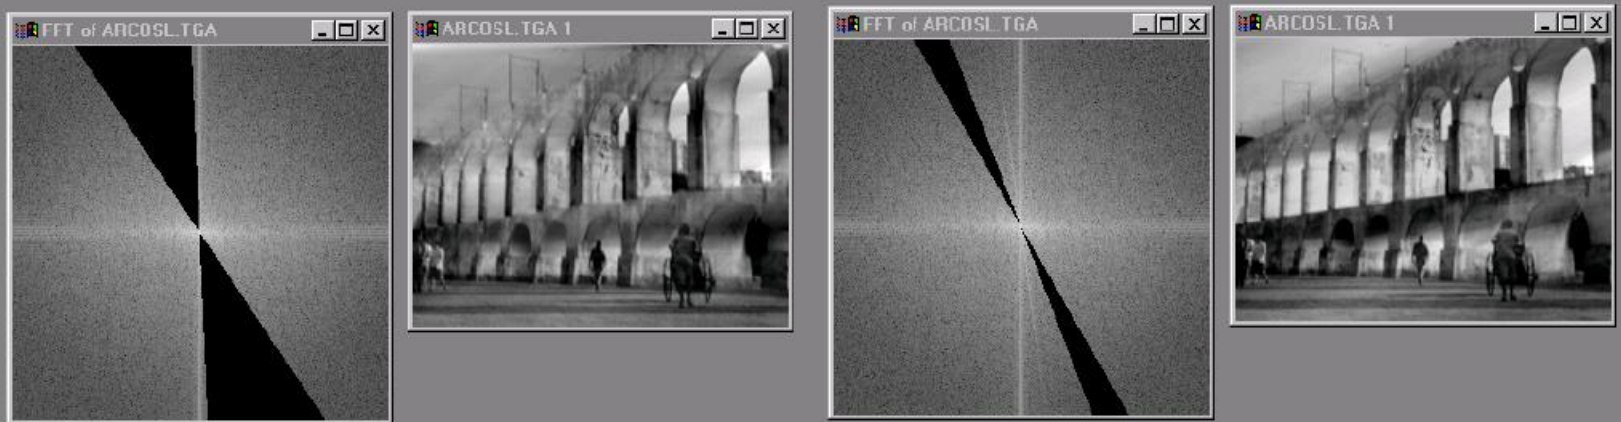




# Effects of Missing Spectra Portions: Radial

(a) Lower frequencies (close to origin) give overall structure

(b) Higher frequencies (periphery) give detail (sharp edges)

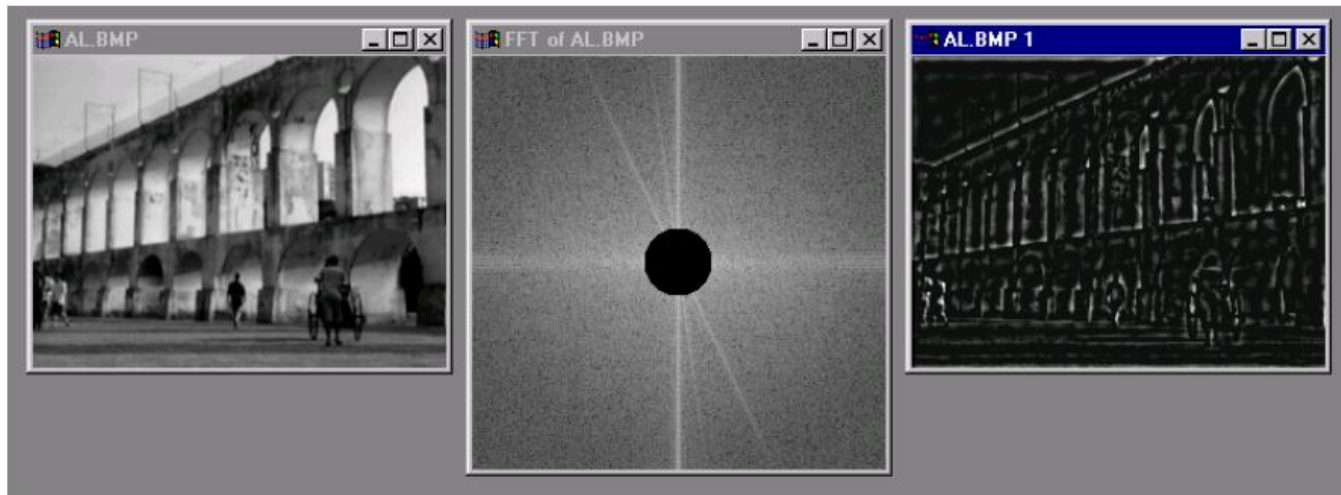


# The Math... 2D DFT

The 2D transform:

$$S(k, l) = \sum_{m=0}^{M-1} \sum_{n=0}^{N-1} s(n, m) e^{\frac{-i2\pi(kn+lm)}{NM}}$$

$$s(n, m) = \frac{1}{NM} \sum_{m=0}^{M-1} \sum_{n=0}^{N-1} S(k, l) e^{\frac{i2\pi(kn+lm)}{NM}}$$

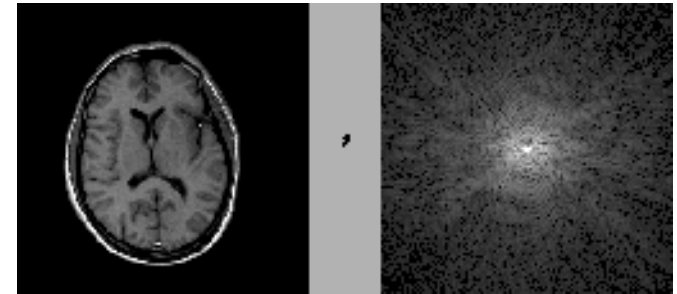

Separability:

$$S(k, l) = \frac{1}{NM} \sum_{m=0}^{M-1} e^{\frac{-i2\pi lm}{M}} P(k, m) \quad \text{where } P(k, m) = \sum_{n=0}^{N-1} s(n, m) e^{\frac{-i2\pi kn}{N}}$$

$$s(n, m) = \frac{1}{NM} \sum_{l=0}^{M-1} e^{\frac{-i2\pi lm}{M}} p(n, l) \quad \text{where } p(n, l) = \sum_{k=0}^{N-1} S(k, m) e^{\frac{-i2\pi kn}{N}}$$

- if  $M=N$ , complexity is  $2 \cdot O(2N^3)$

# Fast Fourier Transform (FFT)

Recursively breaks up the FT sum into odd and even terms:

$$\begin{aligned} S(k) &= \sum_{n=0}^{N-1} s(n) e^{\frac{-i2\pi kn}{N}} = \sum_{n=0}^{N/2-1} s(2n) e^{\frac{-i2\pi k 2n}{N}} + \sum_{n=0}^{N/2-1} s(2n+1) e^{\frac{-i2\pi k (2n+1)}{N}} \\ &= \sum_{n=0}^{N/2-1} s_{\text{even}}(n) e^{\frac{-i2\pi kn}{N/2}} + e^{\frac{-i2\pi k}{N}} \sum_{n=0}^{N/2-1} s_{\text{odd}}(n) e^{\frac{-i2\pi kn}{N/2}} \end{aligned}$$

Results in an  $O(n \cdot \log(n))$  algorithm (in 1D)

- $O(n^2 \cdot \log(n))$  for 2D (and so on)

# Fast Fourier Transform (FFT)

Gives rise to the well-known butterfly Divide + Conquer architecture

- invented by Cooley-Tuckey, 1965)

