

CSE 332
INTRODUCTION TO VISUALIZATION
ILLUSTRATIVE RENDERING

KLAUS MUELLER

COMPUTER SCIENCE DEPARTMENT
STONY BROOK UNIVERSITY

Lecture	Topic	Projects
1	Intro, schedule, and logistics	
2	Applications of visual analytics, data, and basic tasks	
3	Data preparation and reduction	Project 1 out
4	Data preparation and reduction	
5	Data reduction and similarity metrics	
6	Dimension reduction	
7	Introduction to D3	Project 2 out
8	Bias in visualization	
9	Perception and cognition	
10	Visual design and aesthetics	
11	Cluster and pattern analysis	
12	High-Dimensional data visualization: linear methods	
13	High-D data vis.: non-linear methods	Project 3 out
14	High-D data vis.: categorical data	
15	Principles of interaction	
16	Visual analytics and the visual sense making process	
17	VA design and evaluation	
18	Visualization of graphs and hierarchies	Project 4 out
19	Midterm	
20	Visualization of time-varying and time-series data	
21	Maps and geo-vis	
22	Volume visualization: image generation	
23	Volume visualization: transfer functions	Project 4 halfway report due
24	Scientific and medical visualization	
25	Non-photorealistic rendering	
26	Memorable visualizations, visual embellishments	Project 5 out
27	Infographics design, visual embellishments	
28	Projects Hall of Fame demos	

Introduction

Illustrative rendering is also often called *non-photorealistic rendering (NPR)*

- we shall use these terms here interchangeably


NPR offers many opportunities for visualization that conventional *photo-realistic rendering* does not offer

- for this course, we may call our present lighting models (ambient, diffuse, specular) photo-realistic models



photo-realistic,
opaque

Computer Mouse

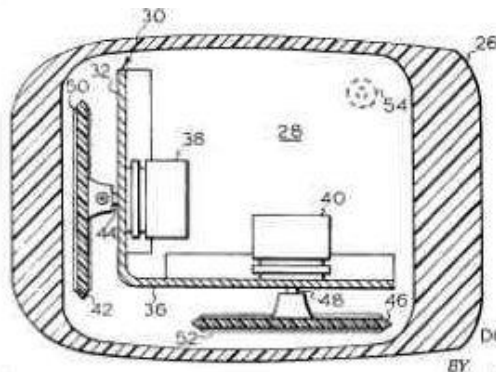


technical drawing



photo-realistic, transparent

INVENTOR:
DOUGLAS C. ENGELBART

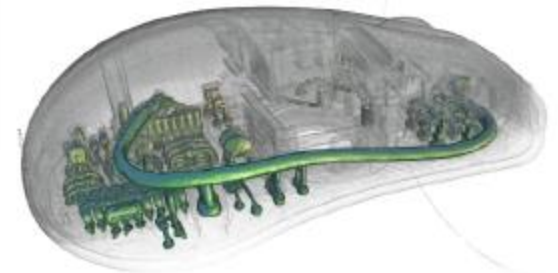


illustrative,
transparent

Illustration in Medical Textbooks...

Frank Netter (1906 – 1991)

- often referred to as “Medicine’s Michelangelo”
- illustrative rendering was key to understanding

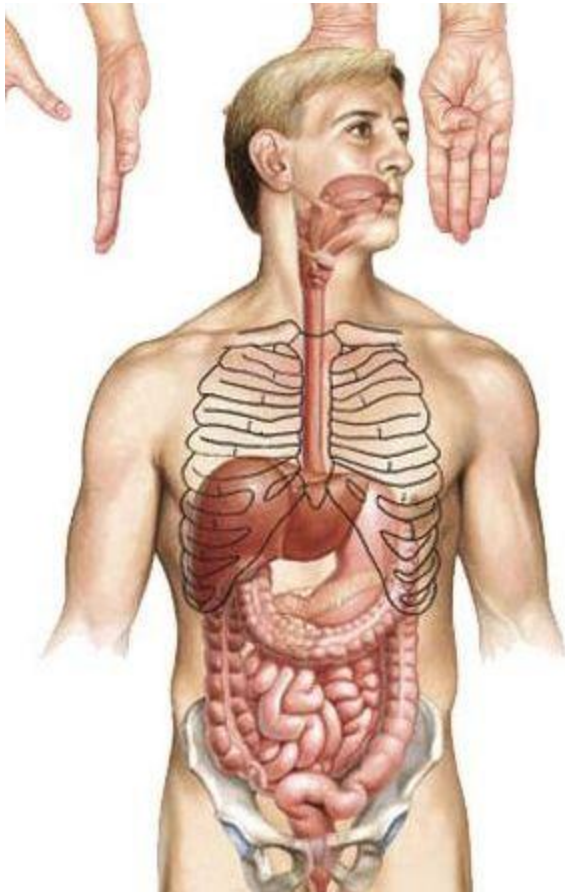

NPR: Added Capabilities

A photorealistic depiction captures the exact appearance of the object as we actually see it

- this can be a limiting paradigm when seeking to convey and communicate information via visuals

A non-photorealistic depiction allows more freedom in this respect:

- allows a greater differentiation in the salience (immediate importance) of the visual representation
- can emphasize critical features
- can minimize the visual salience of secondary details
- allows to hierarchically guide the attentive focus

NPR techniques also:

- allow the expression of multiple styles, potentially increasing the 'dynamic range' of information that can be communicated
- can establish a 'mood' that can influence the subjective context within which the information is perceived and interpreted

A Good Argument for NPR: Tufte's Visualization Rules

“Make all visual distinctions as subtle as possible, but still clear and effective.”

“Maximize data-ink; Minimize non-data ink”


“Hide that data which does not make a difference in what you are trying to depict”

“Minimize clutter”





“Separate figure and background”

Basic Techniques: Contours and Outlines

depth-map
(edges are due
to C_0
discontinuities)

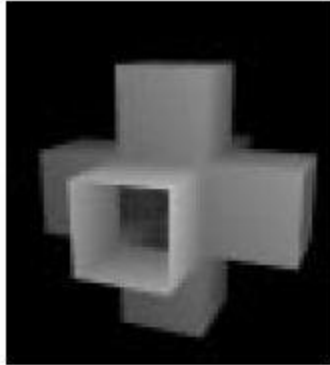

normal-map
(edges are due
to C_1
discontinuities)

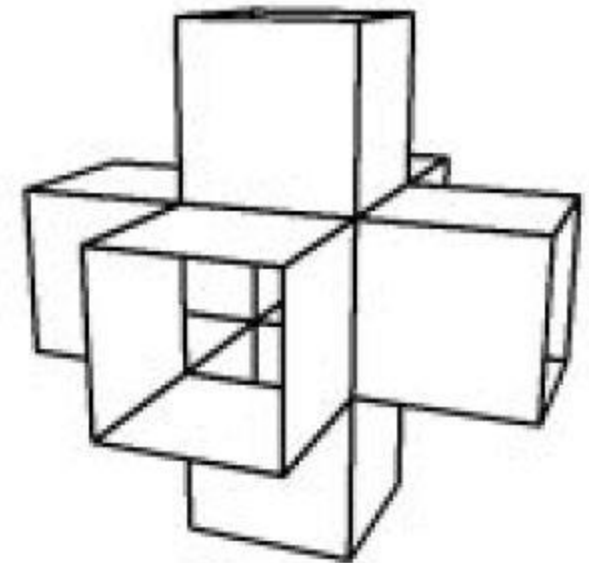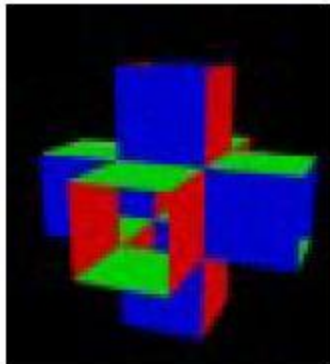



combined

Basic Techniques: Contours and Outlines

depth-map





normal-map

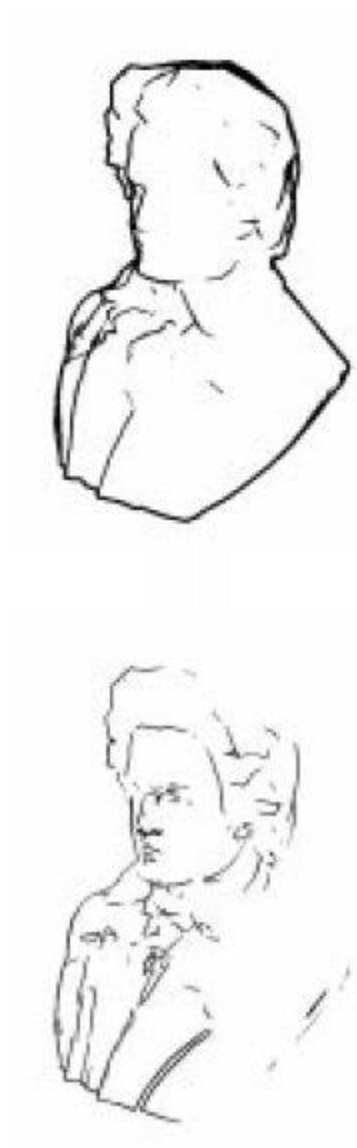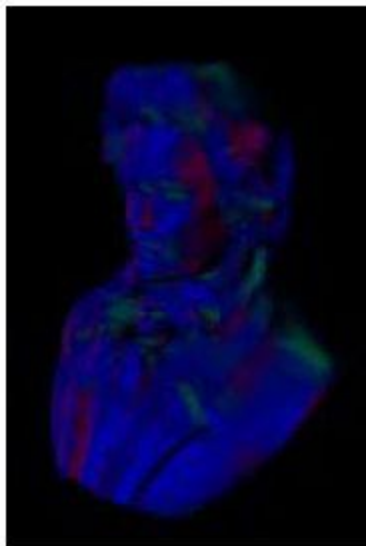

combined



Basic Techniques: Contours and Outlines

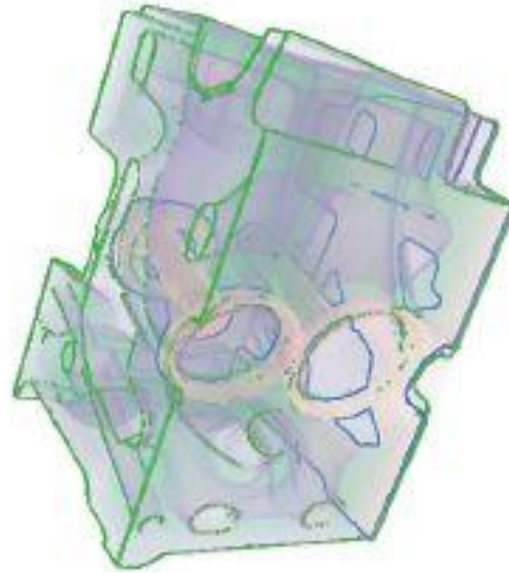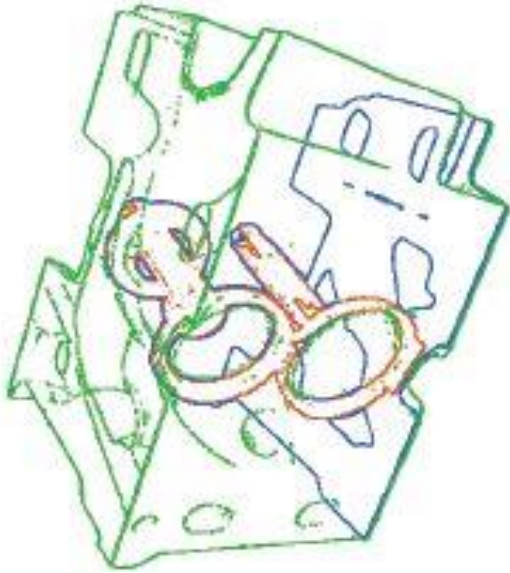

mixing outlines with
volume rendering

uses *depth-peeling* to
render layers one
by one


rendering interior
structures
as contours

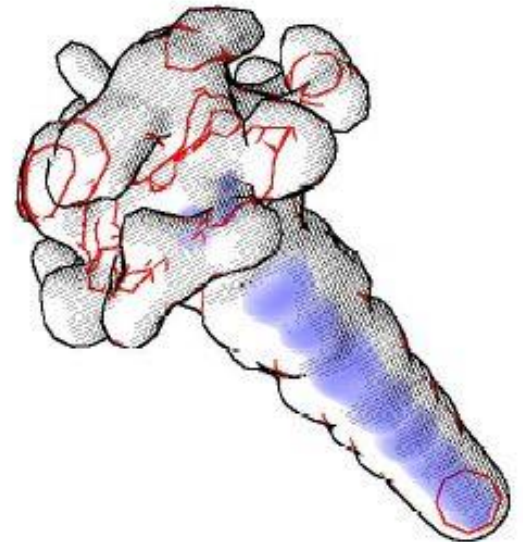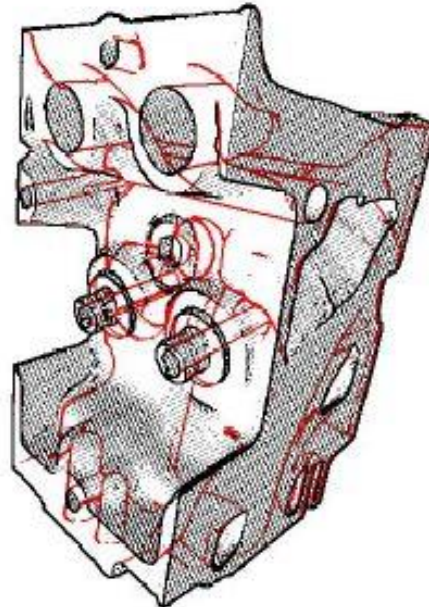

Basic Techniques: Silhouettes

Not an image-space method


- uses dot product $V \cdot N = 0$ criterion
- V : view vector
- N : surface normal

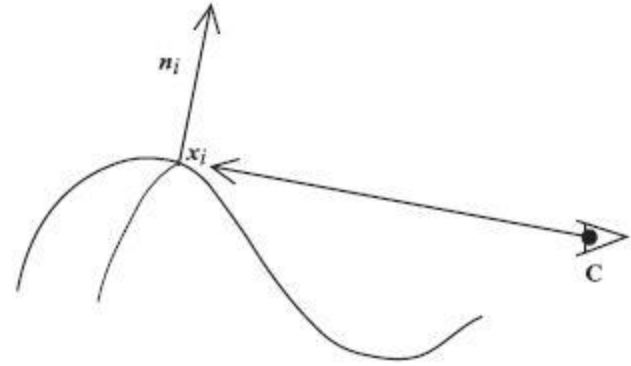

Finds curves and creases at higher quality


Allows further processing of these (for example hatching)

Must disambiguate occlusions

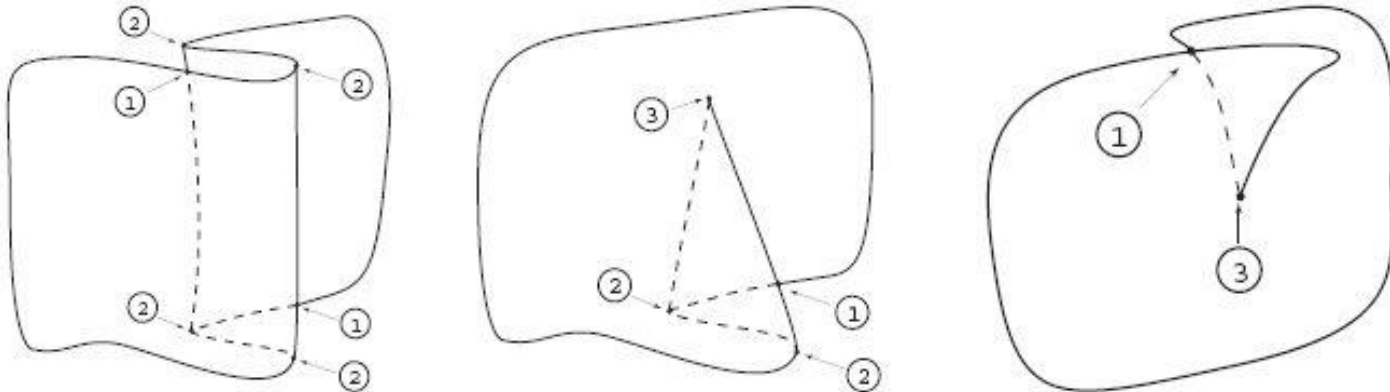

Suggestive Contours



Curves where the surface bends away from the viewer (as opposed bending towards them)

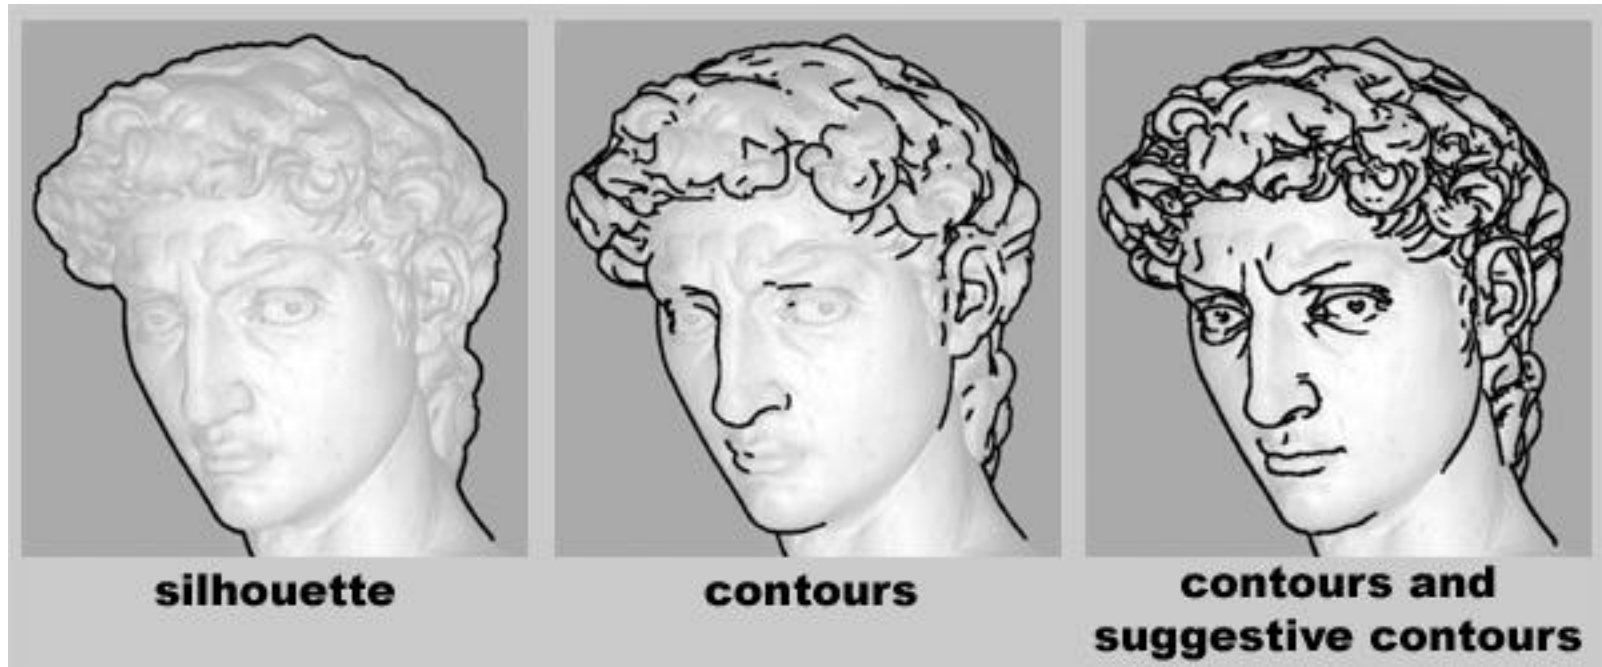


Suggestive Contours

Those locations at which the surface is *almost* in contour, from the original viewpoint

- where the radial curvature ($1/\text{curve radius}$) is zero (inflection point)
- the curve switches from being convex - like a mountain - to concave - (like a valley)
- where $V \cdot N$ is a positive local minimum rather than zero
- the second derivative is zero
- correspond to true contours in relatively nearby viewpoints.
- p is such a suggestive contour point
- q is a contour point

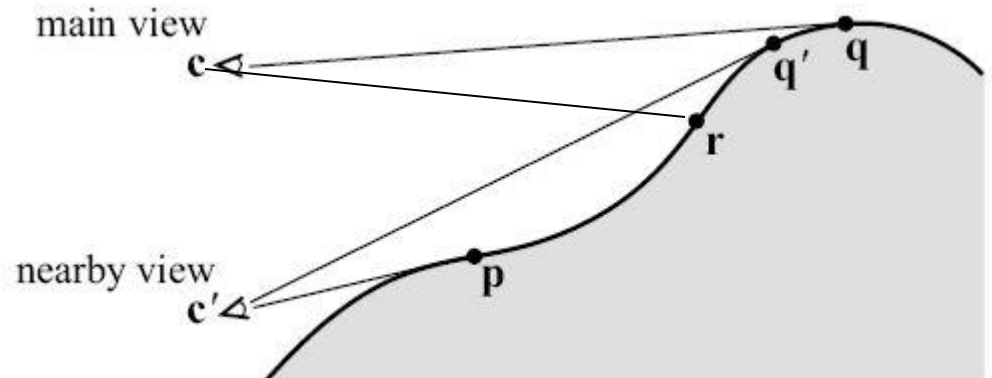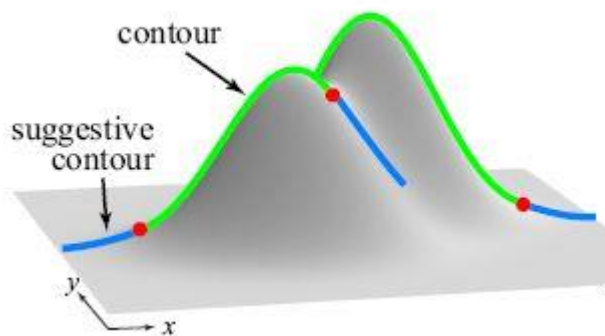

Suggestive Contours

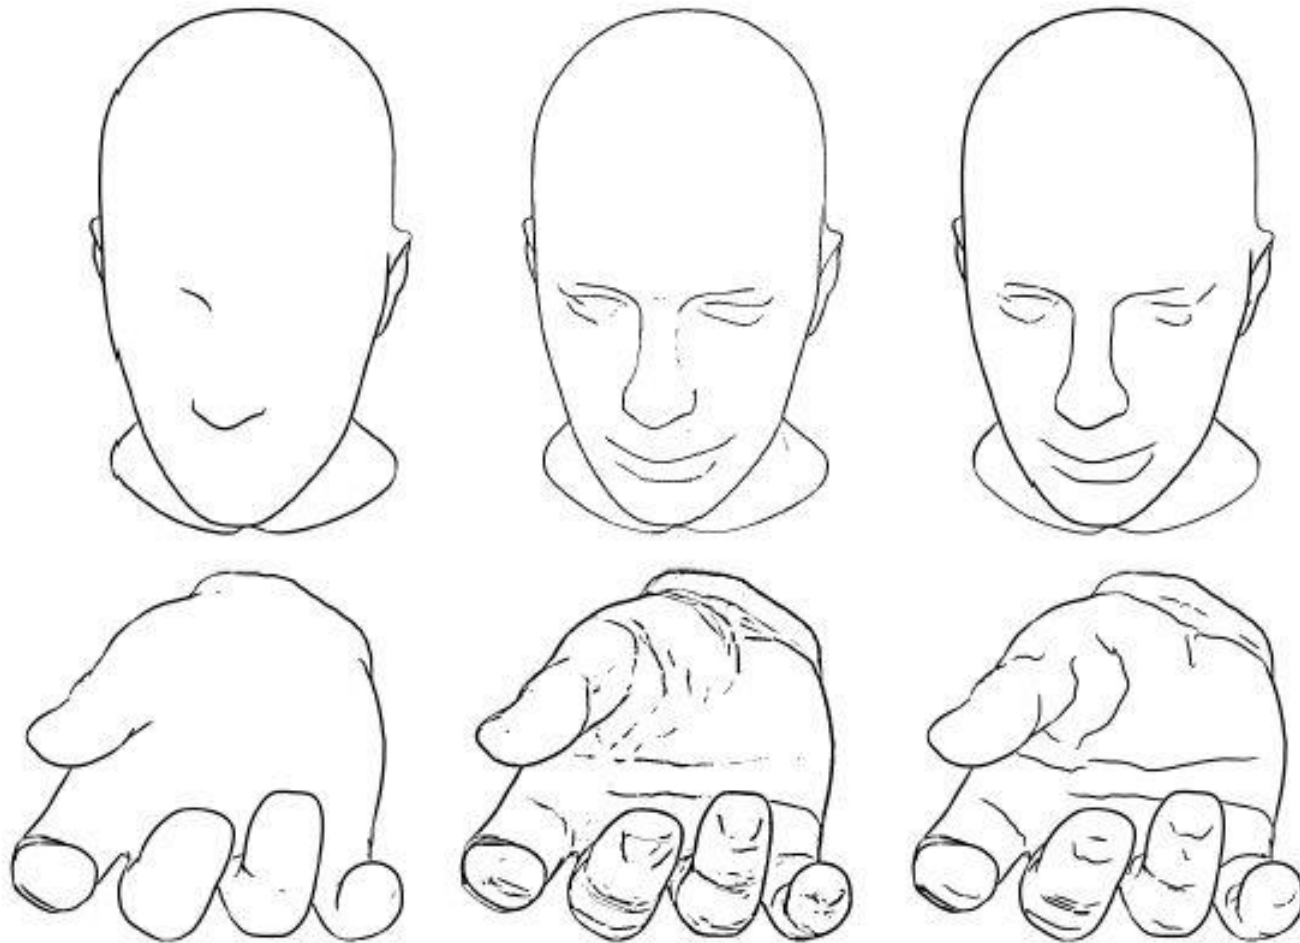


contours

suggestive contours
(image space vs. object space method)

Suggestive Contours

Require the computation of the second derivative at high accuracy


- use high-quality 2nd derivative (curvature-estimation) filters for volume datasets

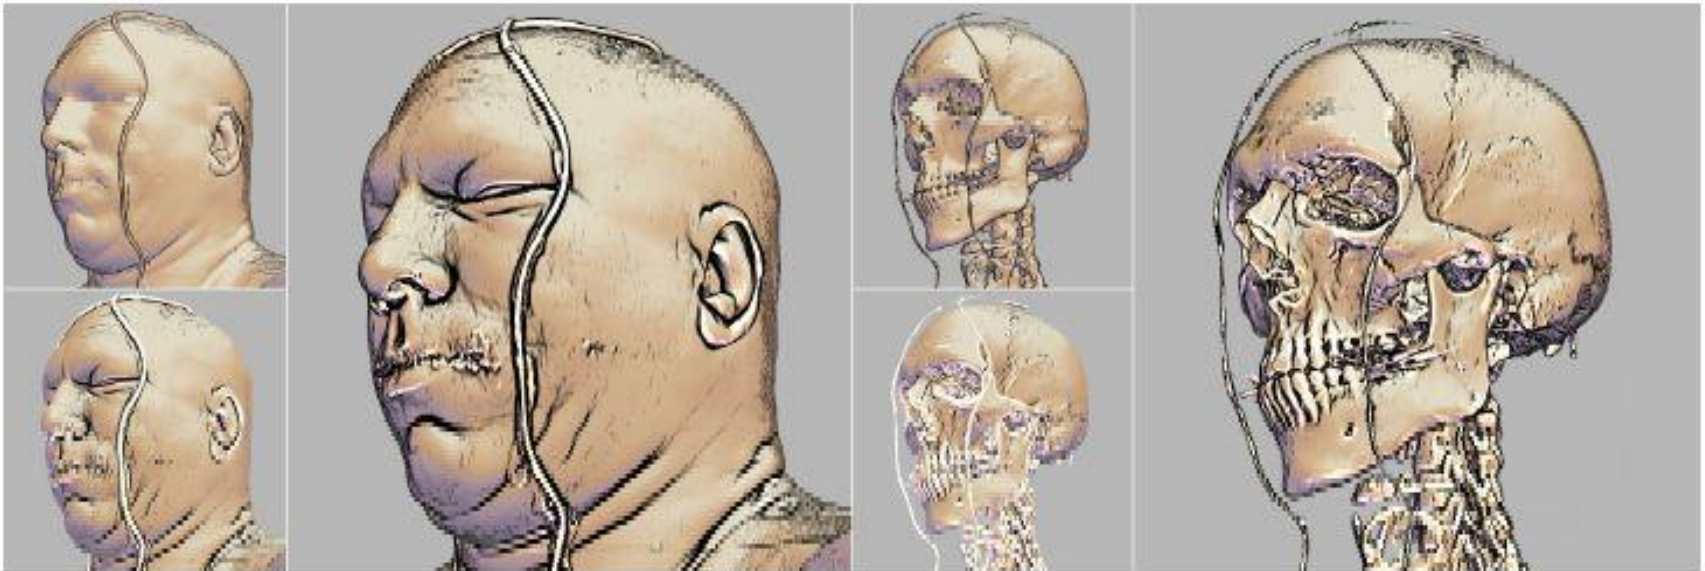

Curvature Stroke Lines


Semitransparent iso-intensity surface for radiation treatment planning and a tumor inside.

Right: Strokes along the principal curvature are added to convey shape

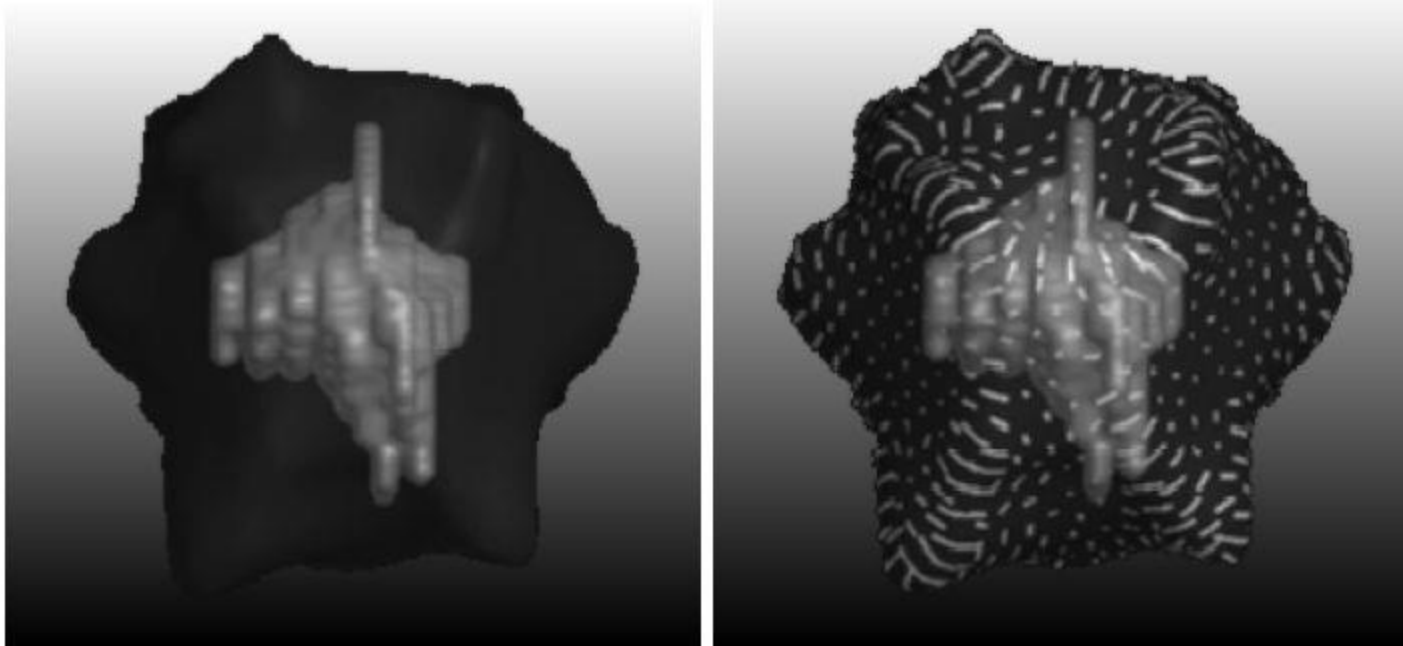


Hatching

Applies this illustration style as a function of illumination and others

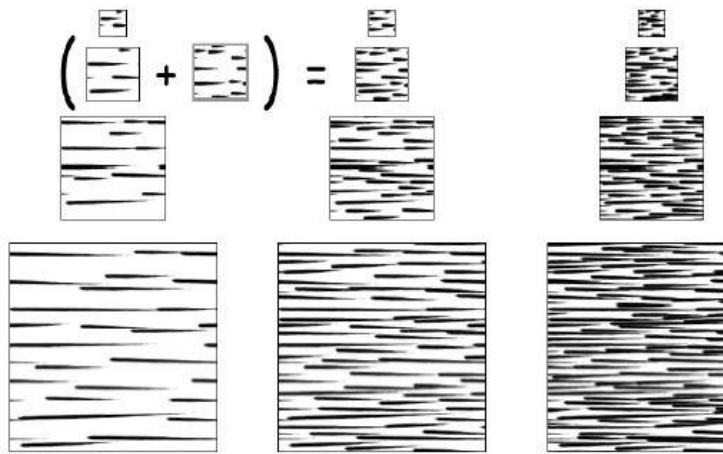


portion of the tonal art map

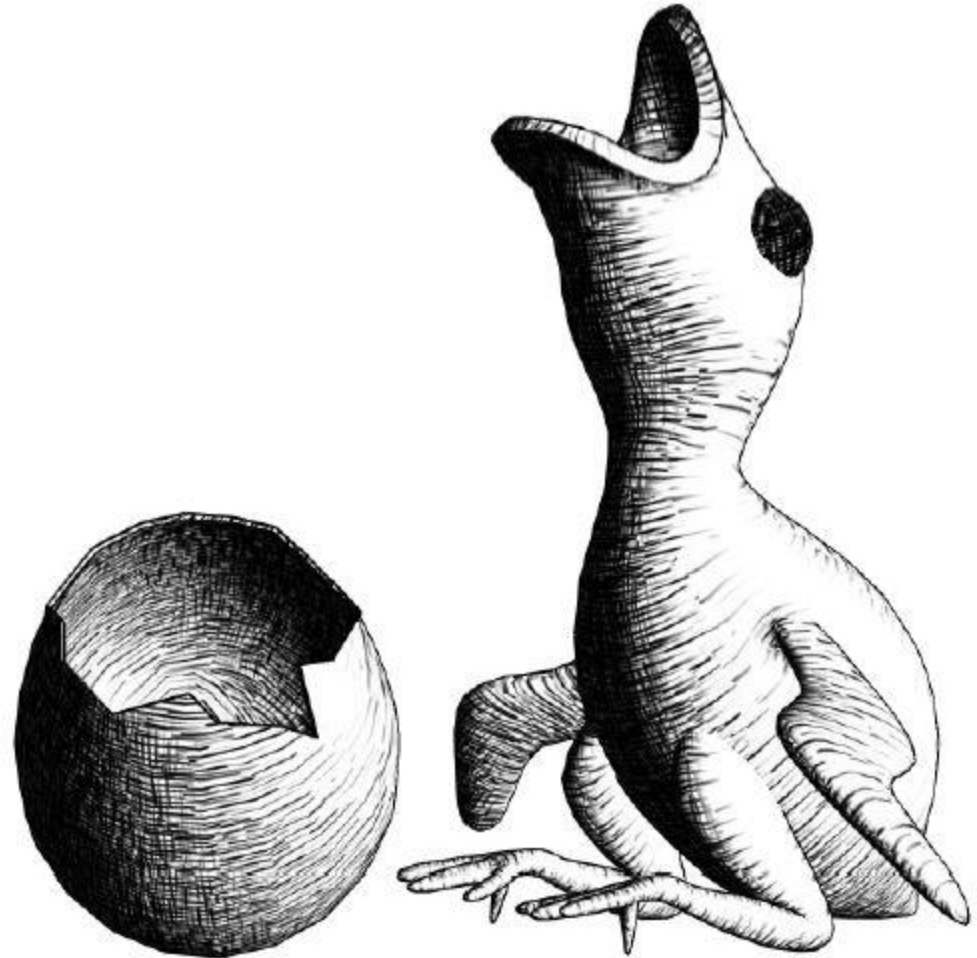

Stippling

Stippling is yet another illustration technique




- vary the density of points with illumination and/or other attribute

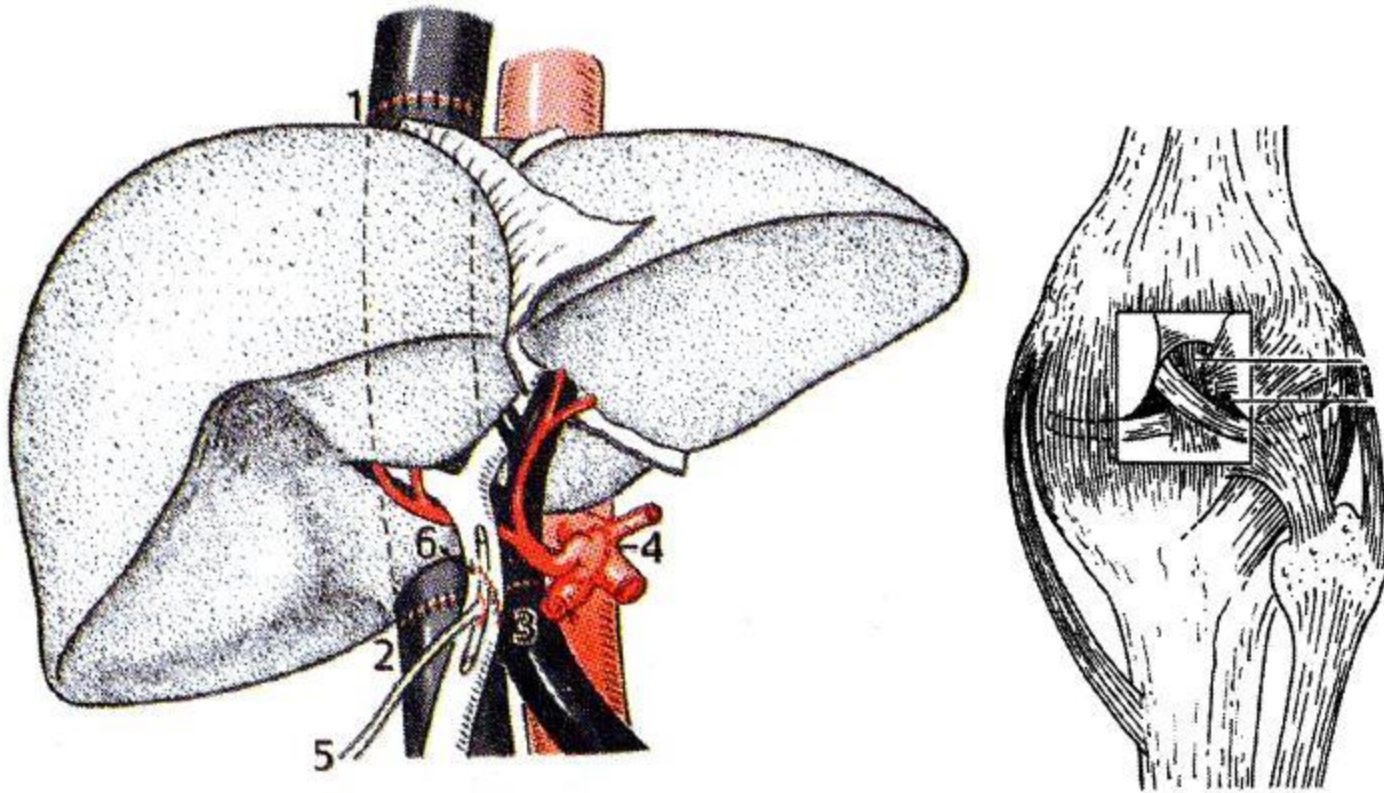


Highlighted Edges

Color interior edges white


- simulates anisotropic reflections at edges

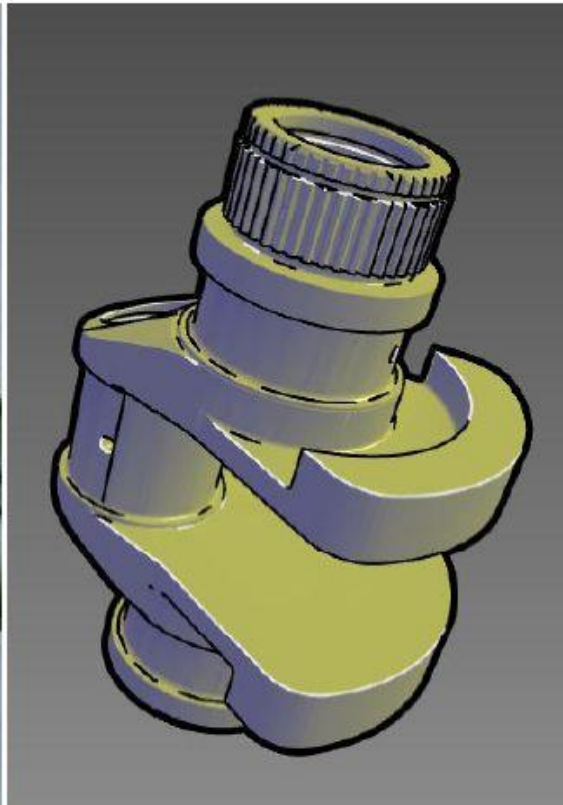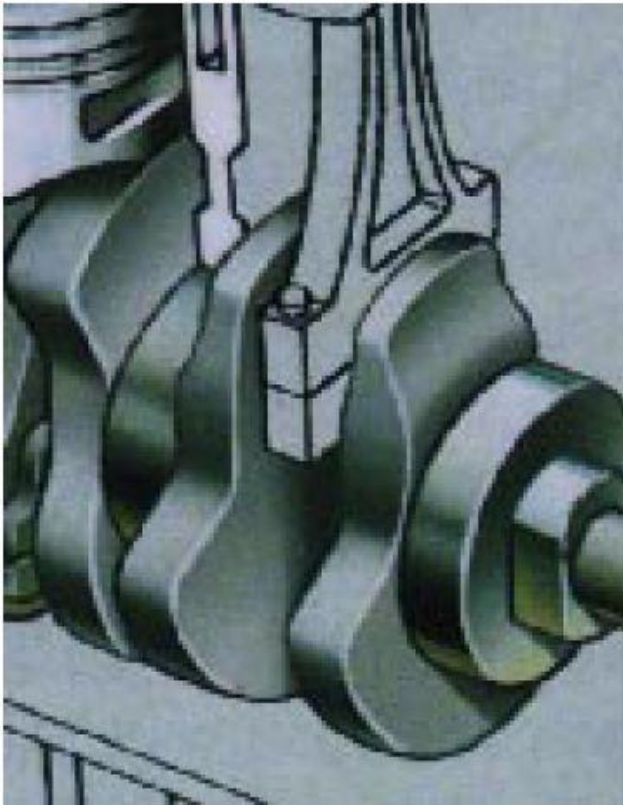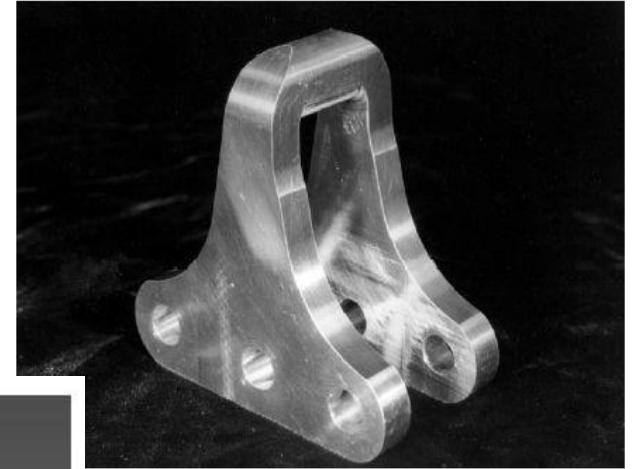

Tone Shading

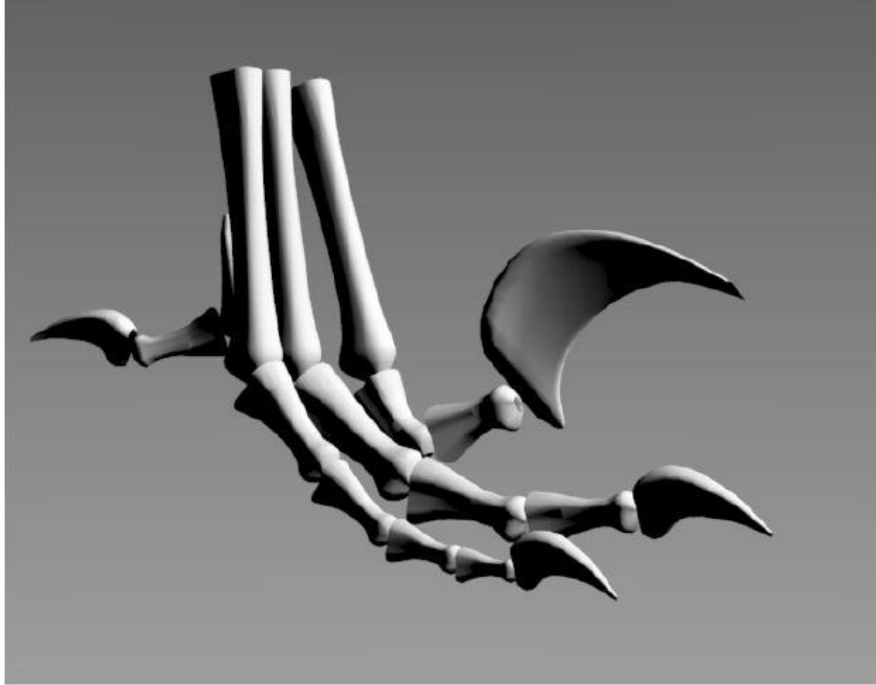


Typical photo-realistic image:
diffuse shading removes detail
in dark and white areas

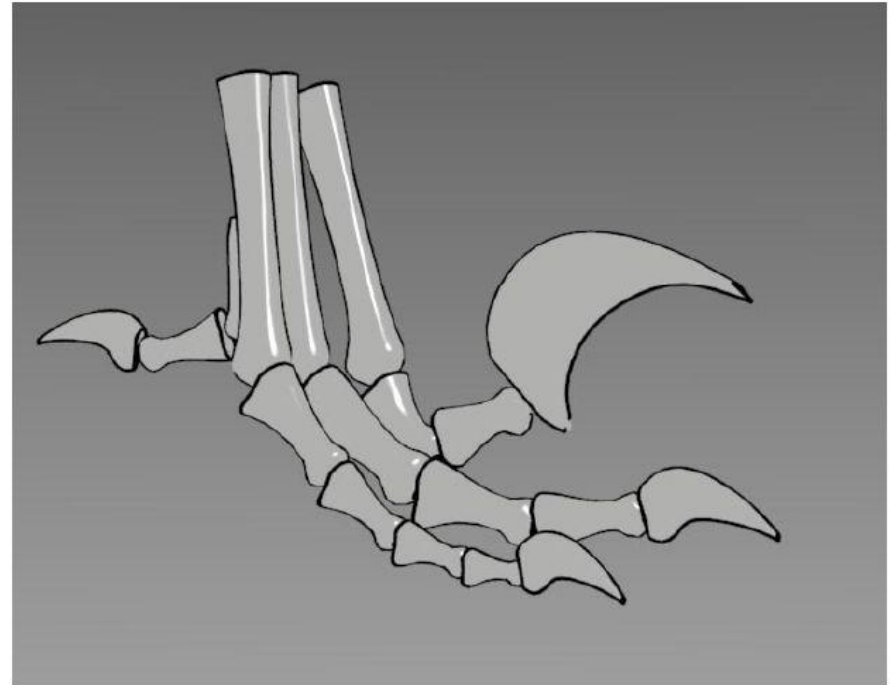


Now with highlights and
edges, but without diffuse
shading:
shape information is lost

Tone Shading

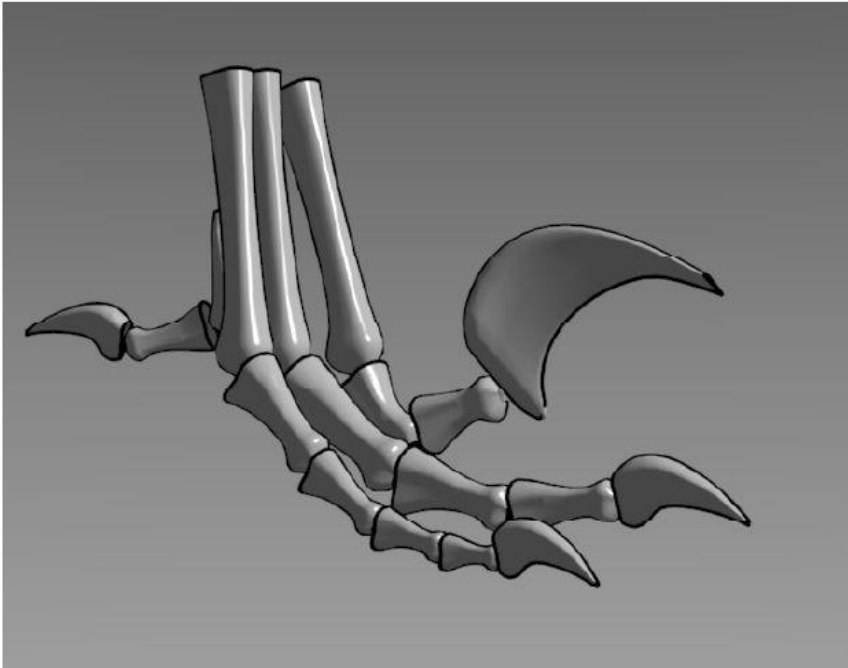



With edge lines and highlights:
better, but still detail is lost in
dark areas

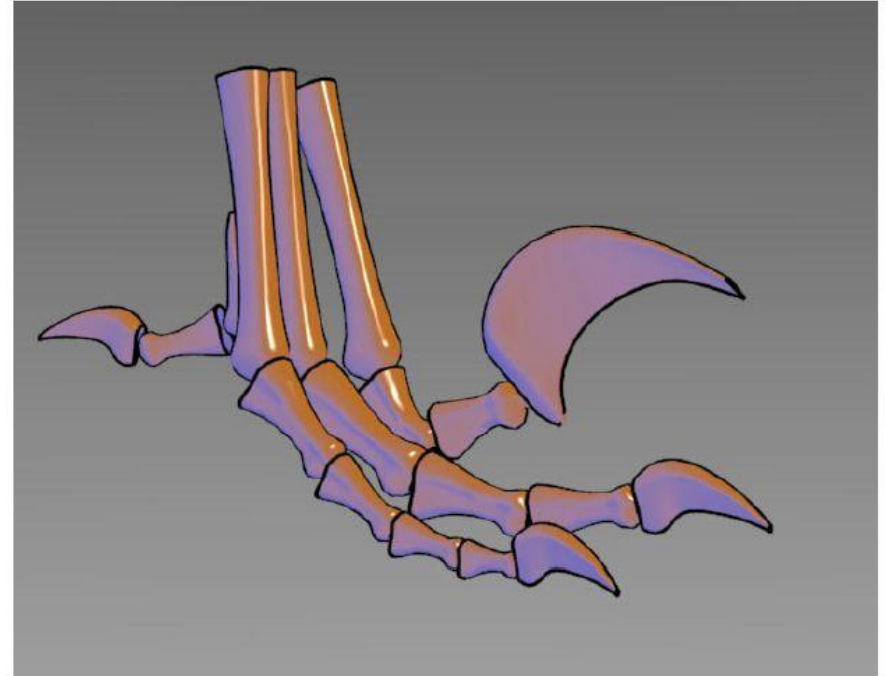



No luminance variations,
instead use tonal shading
(cool-to-warm shift), along
with highlights and edges

Tone Shading

Mix luminance shift and tonal shift with a weighted sum

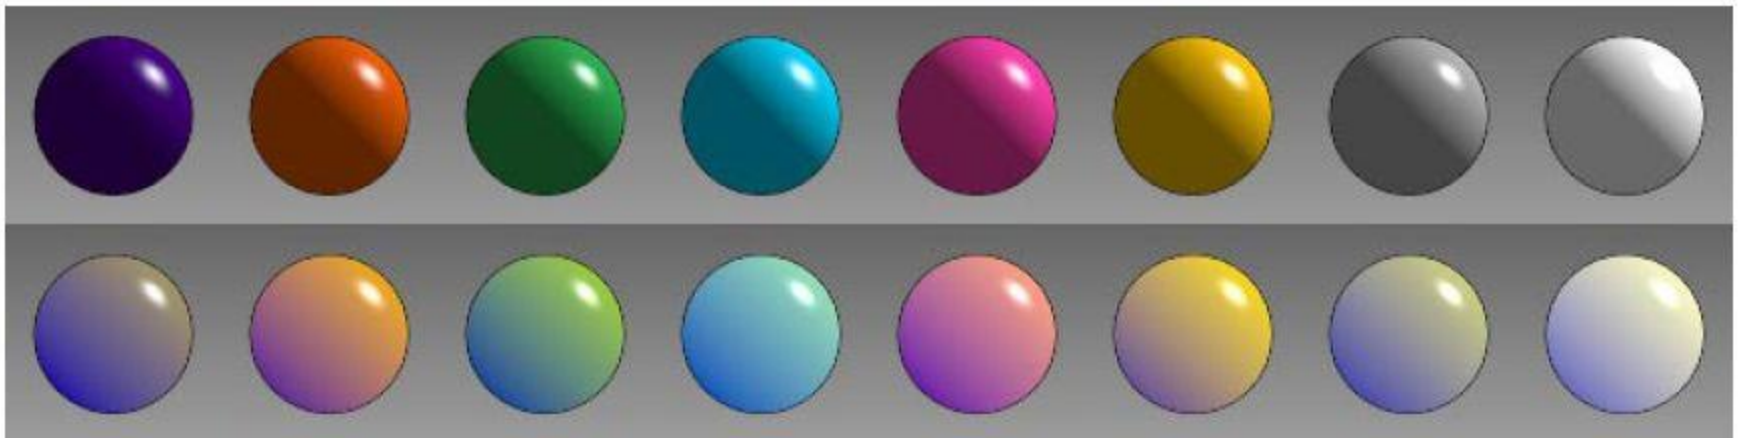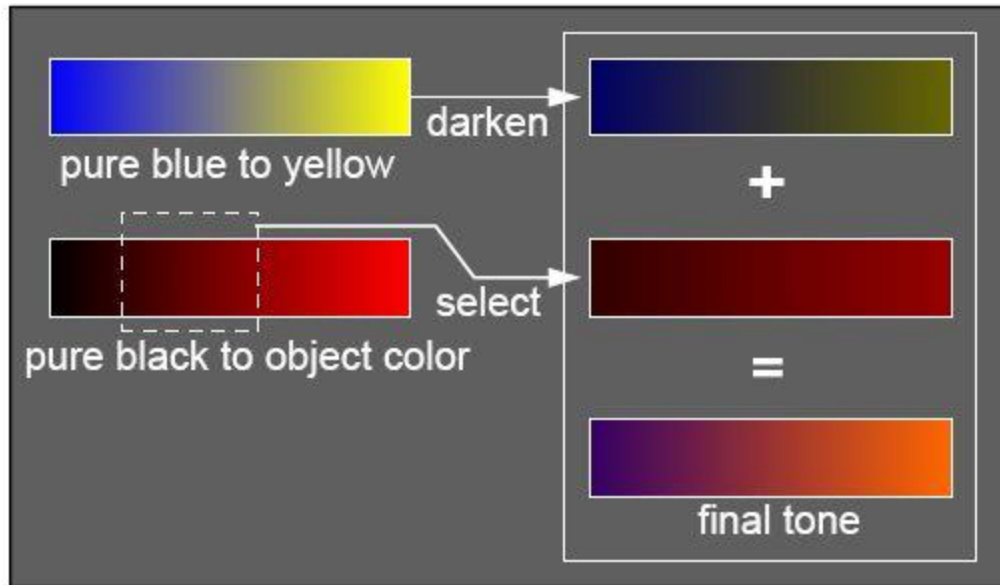

Tone Shading

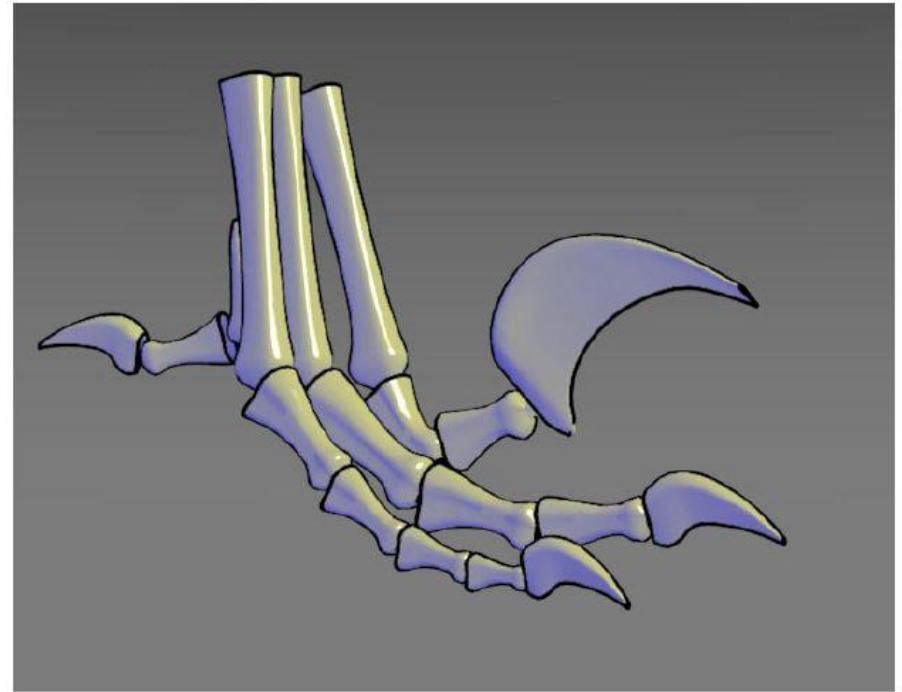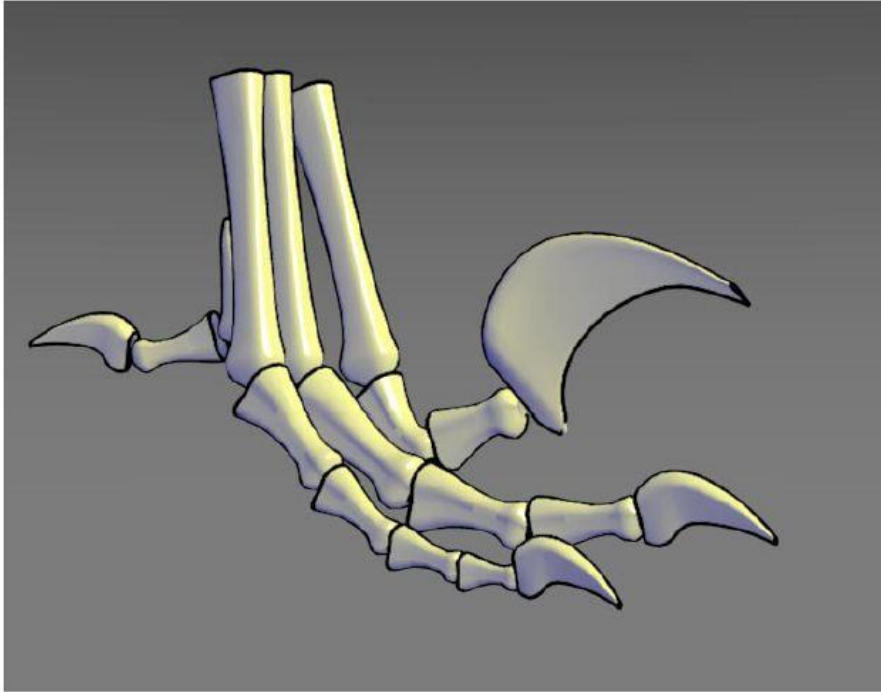

Different settings for weighted luminance/hue tone rendering.
Combines two effects with edges and highlights



Tone Shading

Specifically for volume visualization



Tone Shading

Specifically for volume visualization

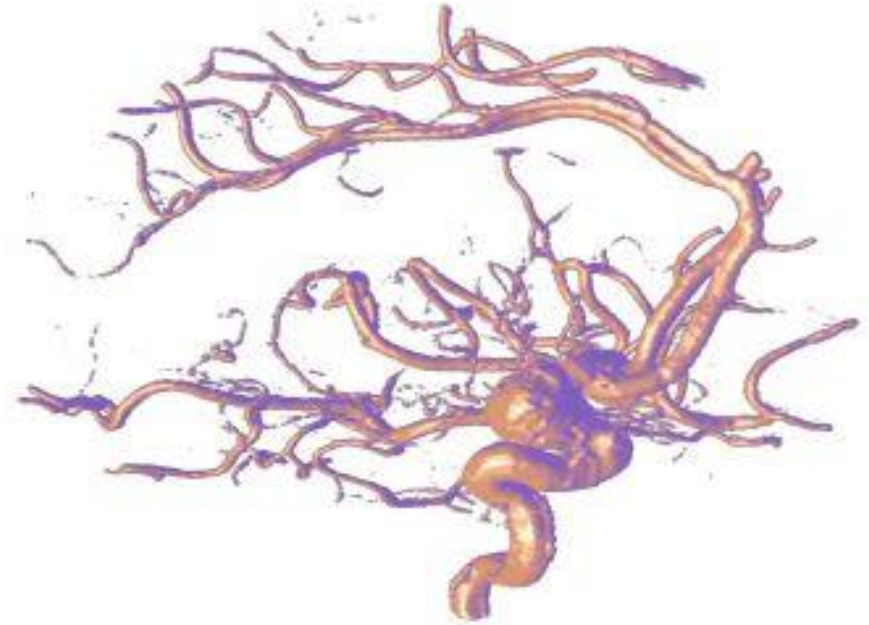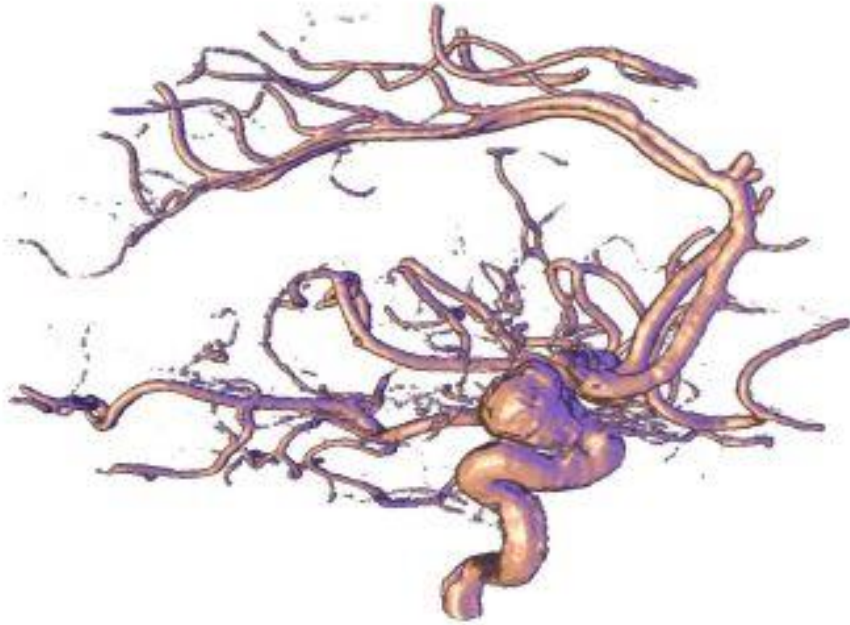

Metal Shading


Milling creates what is known as “anisotropic reflection.”

Lines are streaked in the direction of the axis of minimum curvature, parallel to the milling axis.

To simulate a milled object, Gooch et al. map a set of 20 stripes of varying intensity (random) along the parametric axis of maximum curvature.




left: no metal
right: metal rendering


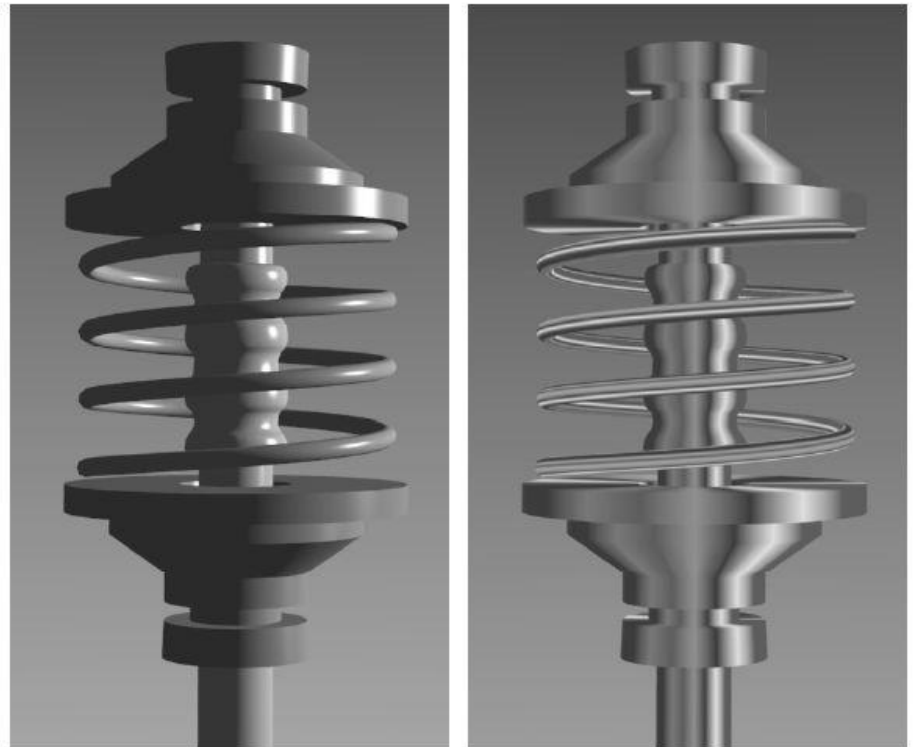


Metal Shading

with edge lines (left) and cool-to-warm tonal shading (right)

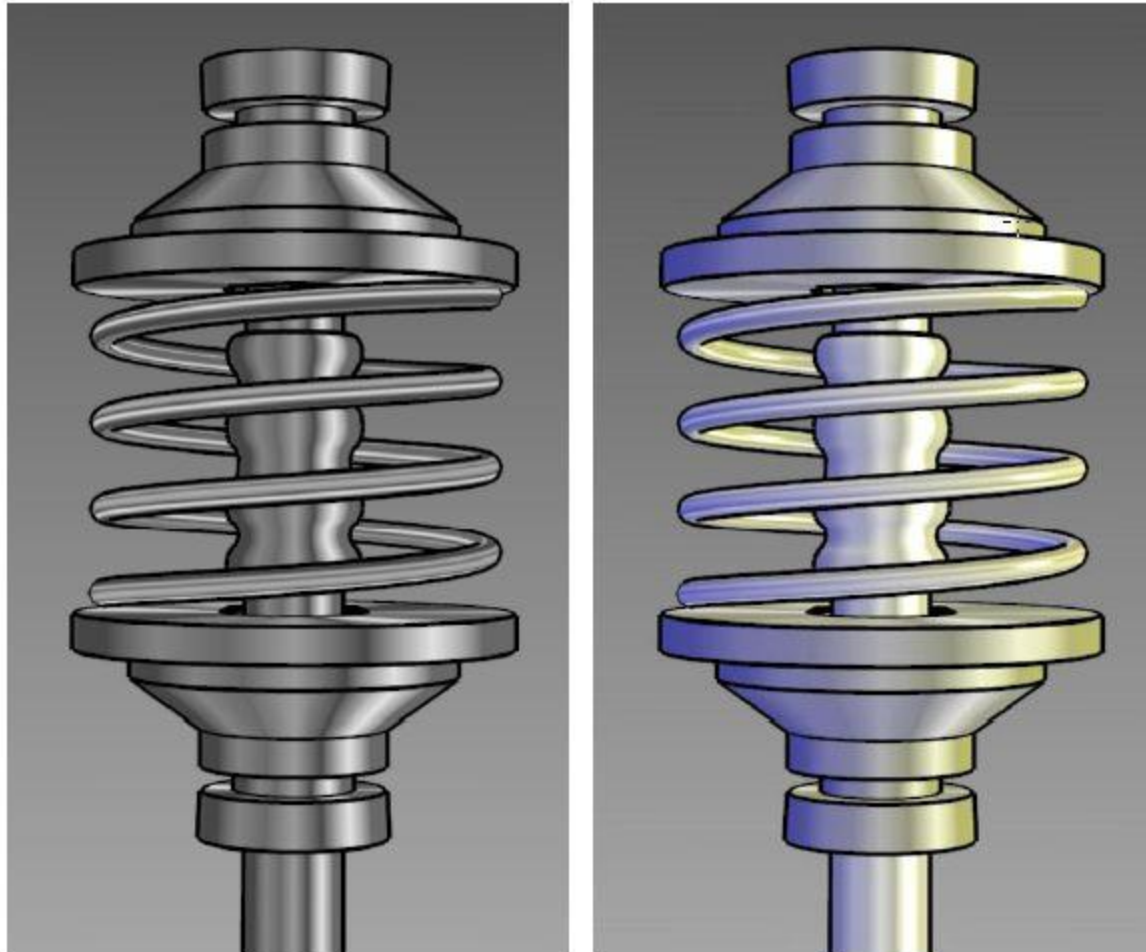



Metal Shading

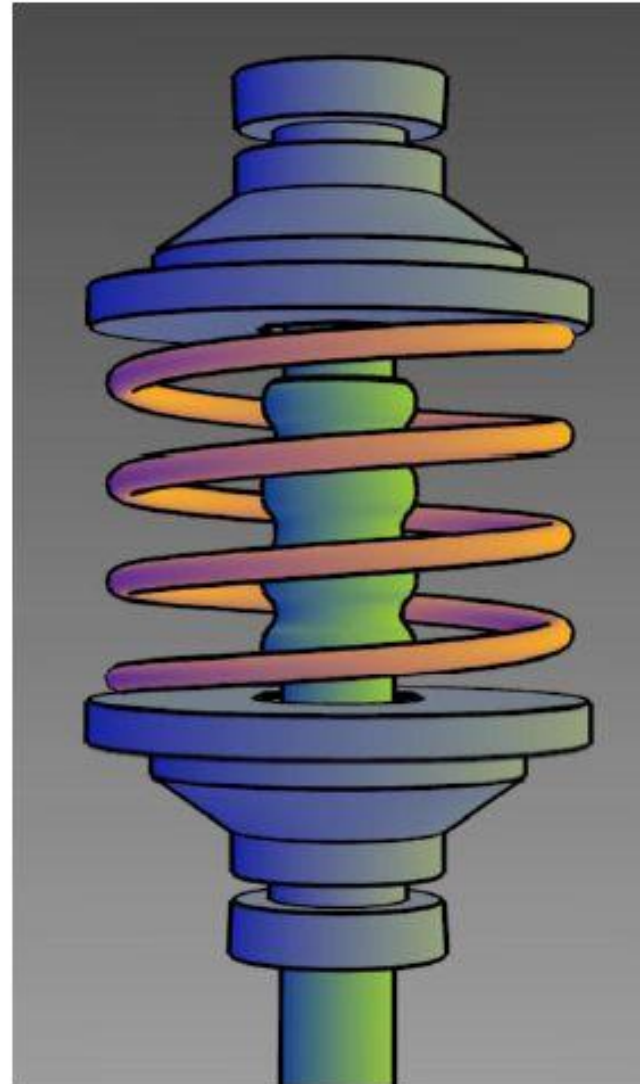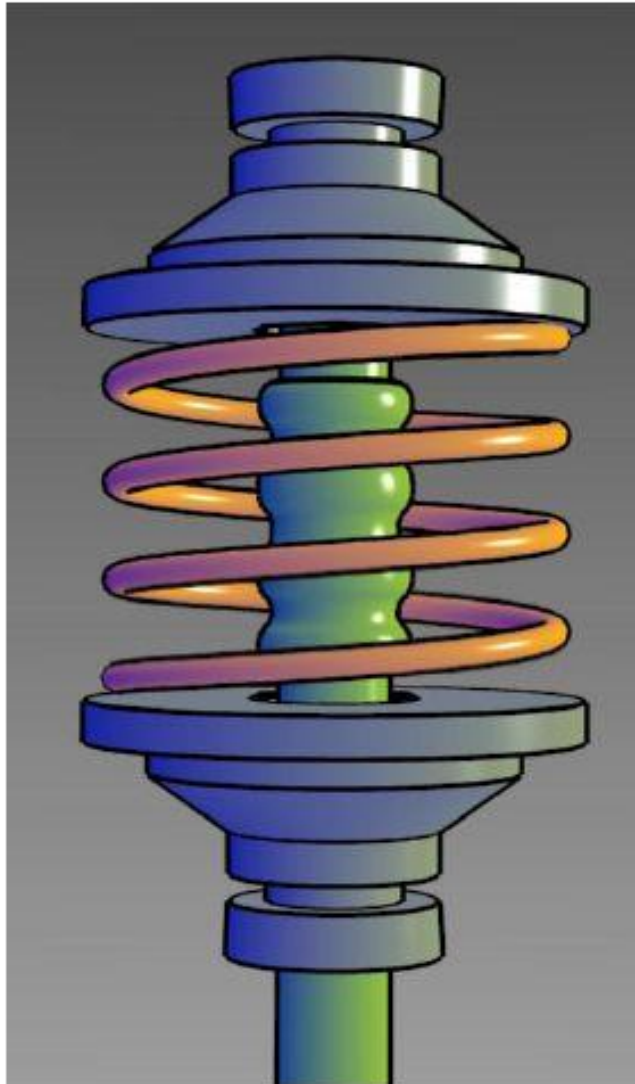


Mixing Rendering Techniques

Assign most appropriate rendering technique for different features:

- skin: silhouette rendering
- eyes: shaded direct volume rendering
- skull: X-ray
- trachea: Maximum Intensity Projection

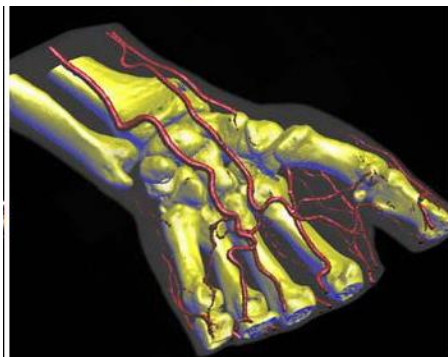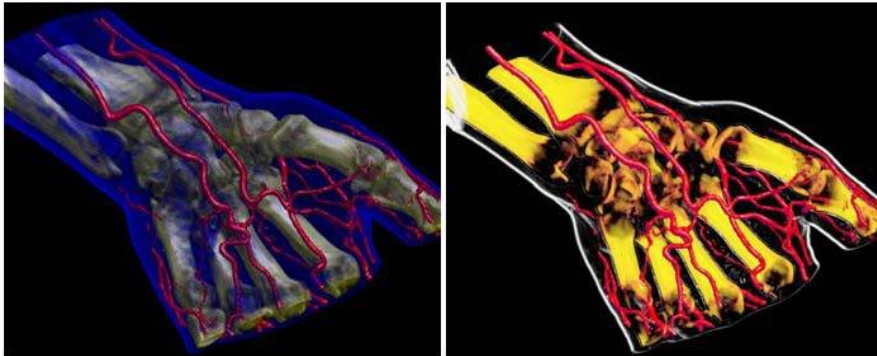

hand dataset


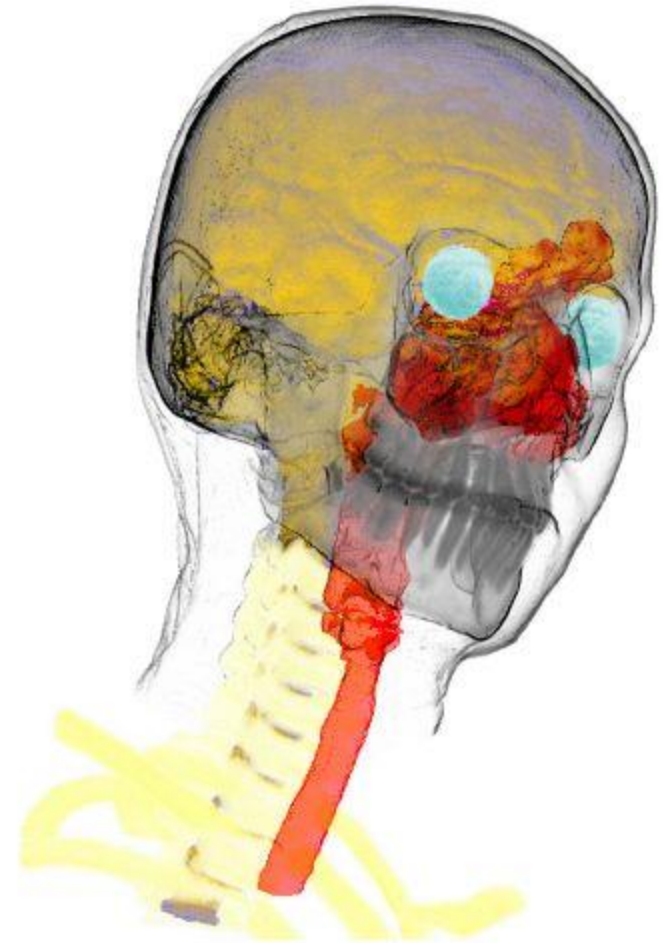


Mixing Rendering Styles

First, classify the scene:


- *Focus Objects (FO)*: objects in the center of interest are emphasized in a particular way
- *Near Focus Objects (NFO)*: important objects for the understanding of the functional interrelation or spatial location.
- *Context Objects (CO)*: all other objects (rendered e.g., as silhouettes)
- *Container Objects (CAO)*: one object that contains all other objects.

Render these in a certain order to ensure visual consistency

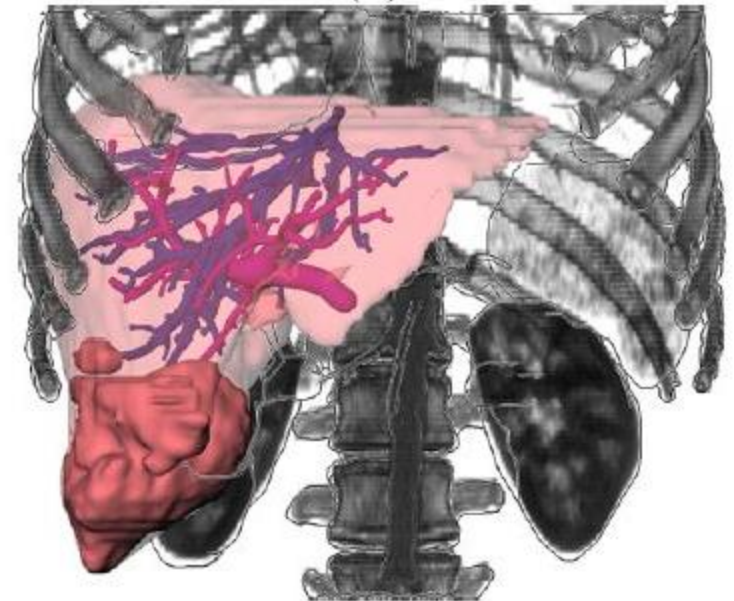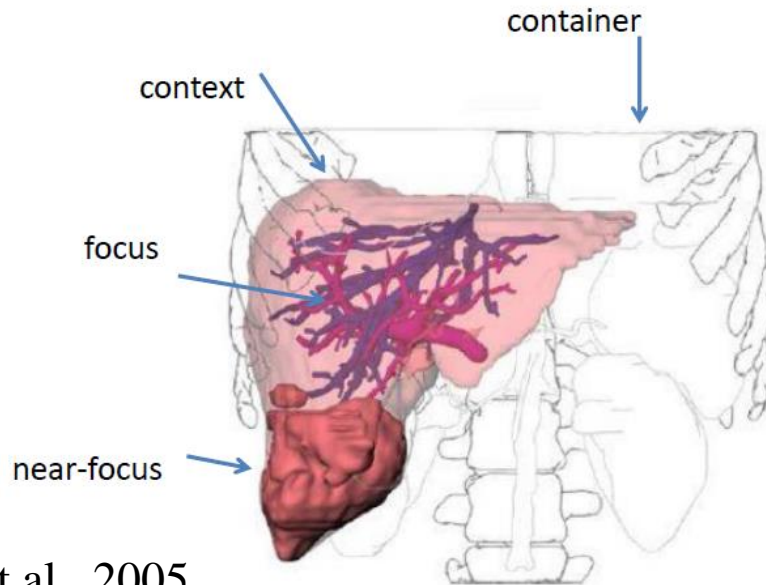

Halos



Can enhance depth perception

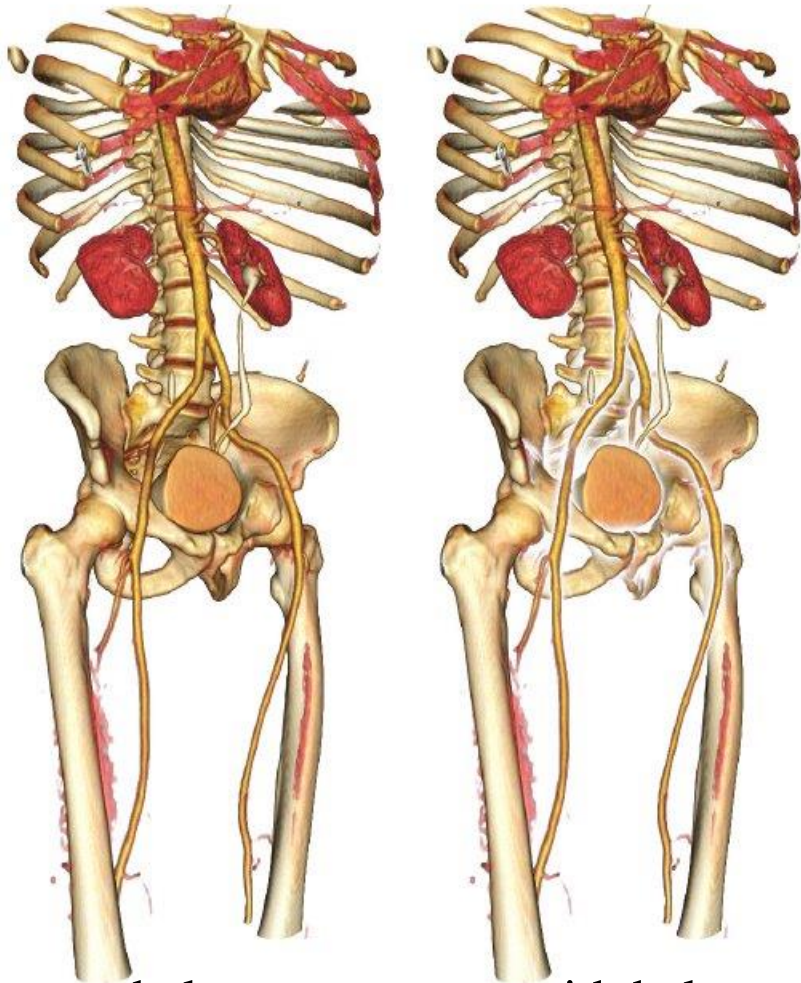

no halos

with halos

Bruckner et al., 2006

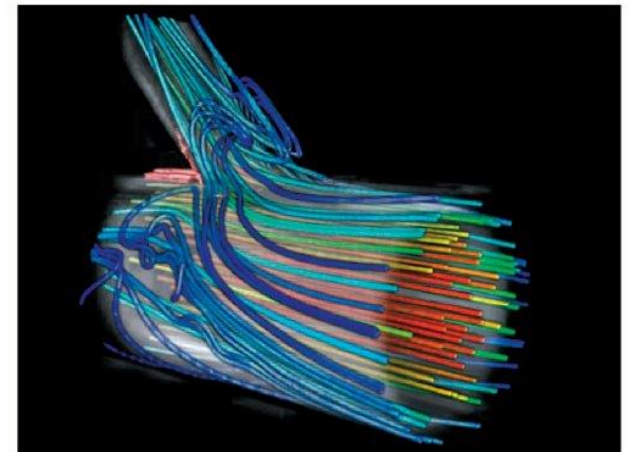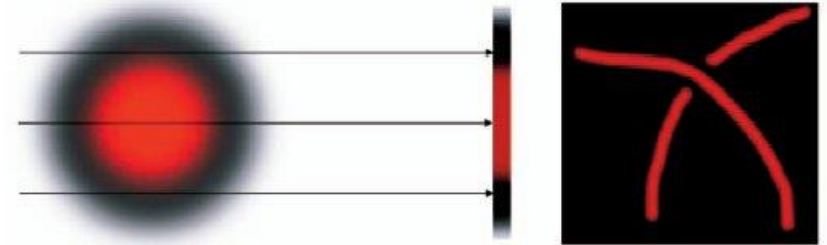

Wenger et al., 2006

Illustrative Lighting Effects


Inconsistent shading to show depth:




Original normals n_i at level i



Smoothed normals n_{i+1} at level $i+1$



Light l_{i+1} projected \perp to n_{i+1}




Lighting $c_i = f(\cos \theta) = f(\hat{n}_i \cdot \hat{l}_{i+1})$



Rusinkiewicz et al., 2006



consistent

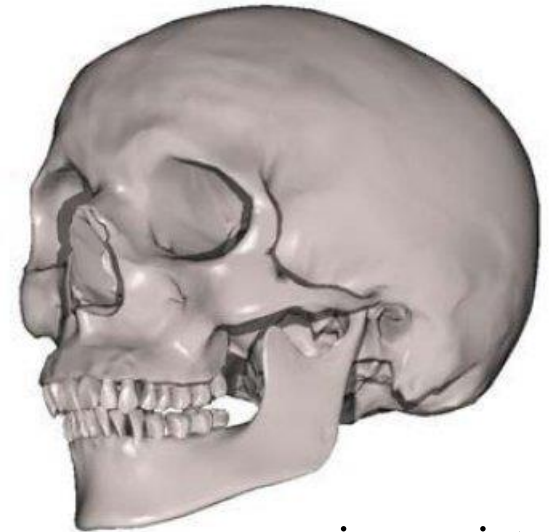

inconsistent

Lee et al., 2006

Illustrative Lighting Effects



Bryce Canyon
early morning



Inconsistent
shading

Acquisition

Dome of light sources

- turned on one at a time

Camera on top

- taking a picture for each light source's reflections

Combine lighting information for optimal feature enhancement



Example: 4,000-Year Old Sumarian Tablet



Two Levels Of Abstraction



Low-level abstraction:

- concerned with **how** objects are represented
- stylized depiction: silhouettes, contours, pen+ink, stippling, hatching, etc.



High-level abstraction

- deal with **what** should be visible and recognizable and at **what** level of detail
- this should be importance-driven, that is, the current visualization goal controls feature rendering style and visibility
- we will discuss these next
- smart visibility: cutaways, breakaways, ghosting, exploded views



Cut-Aways

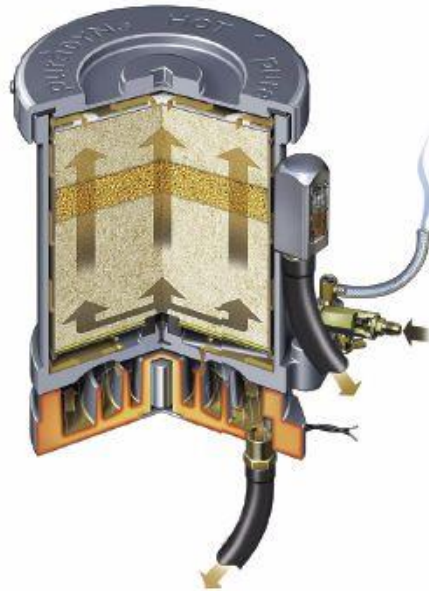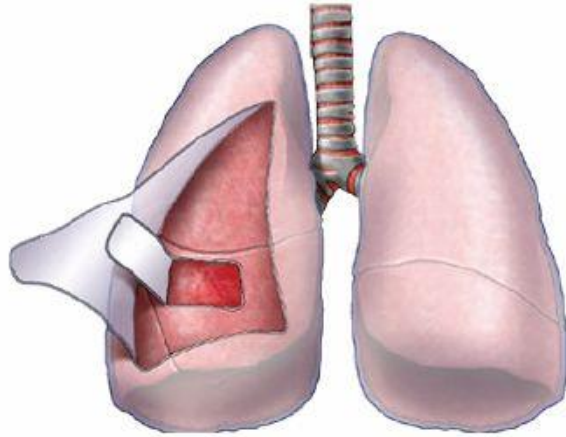

Cut-Aways

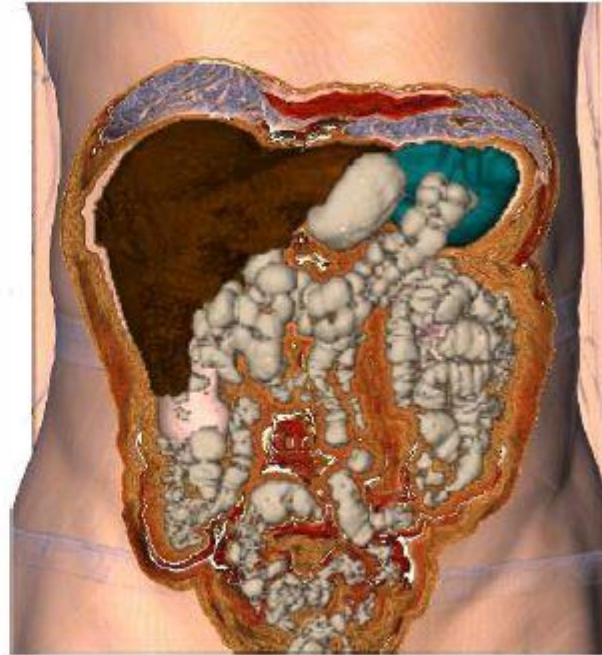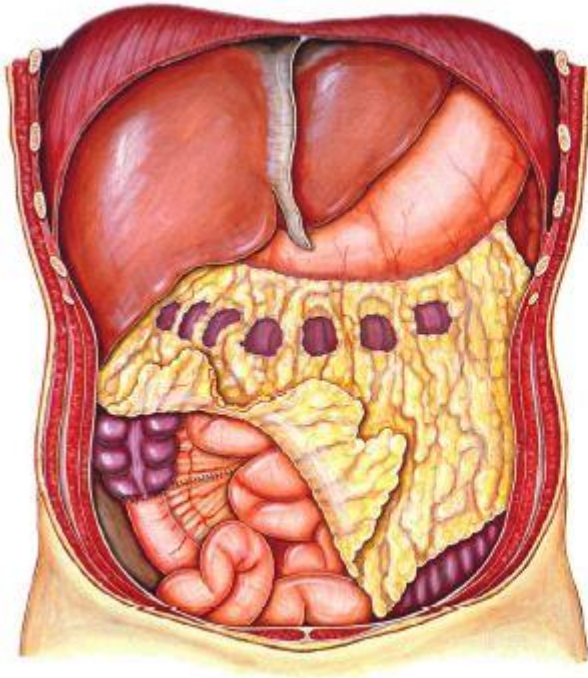


Ghosting

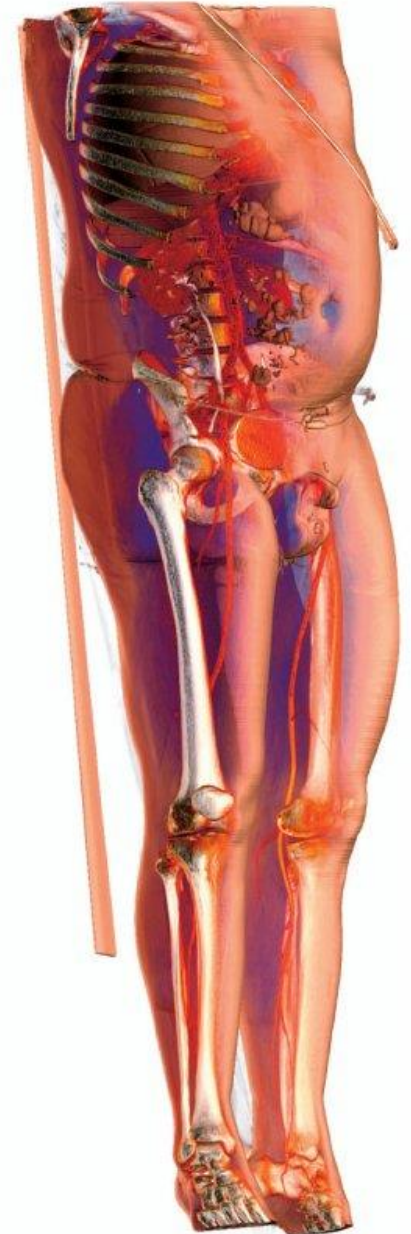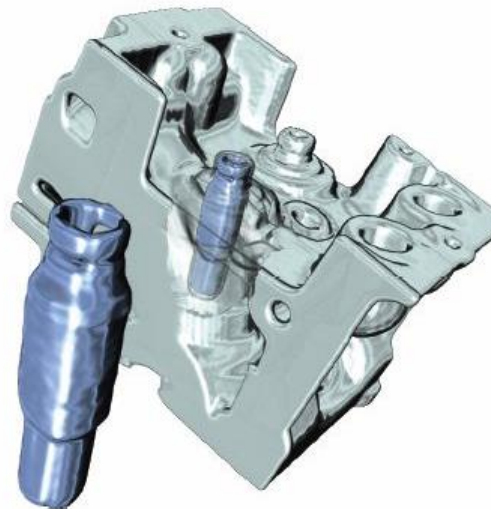


Bruckner et al., 2006


Focus + Context

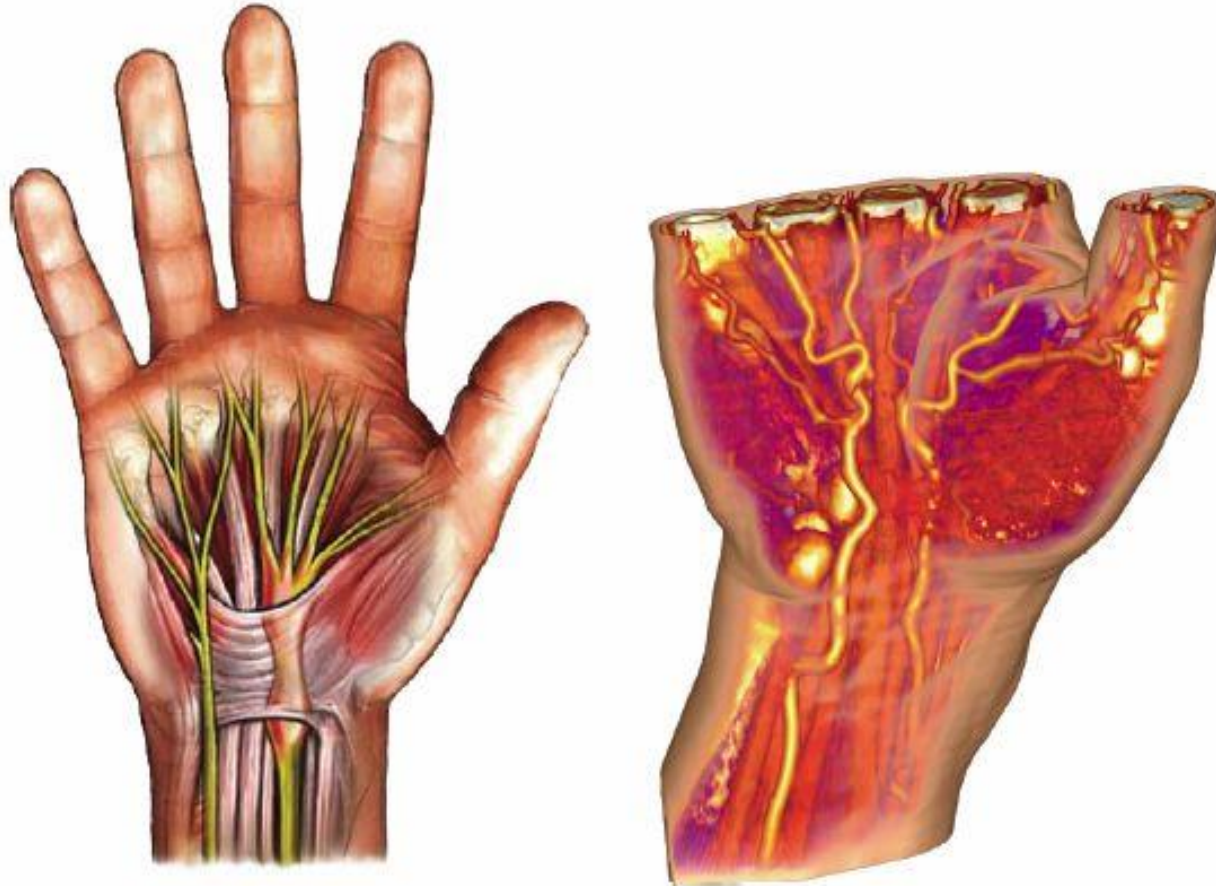

Fans

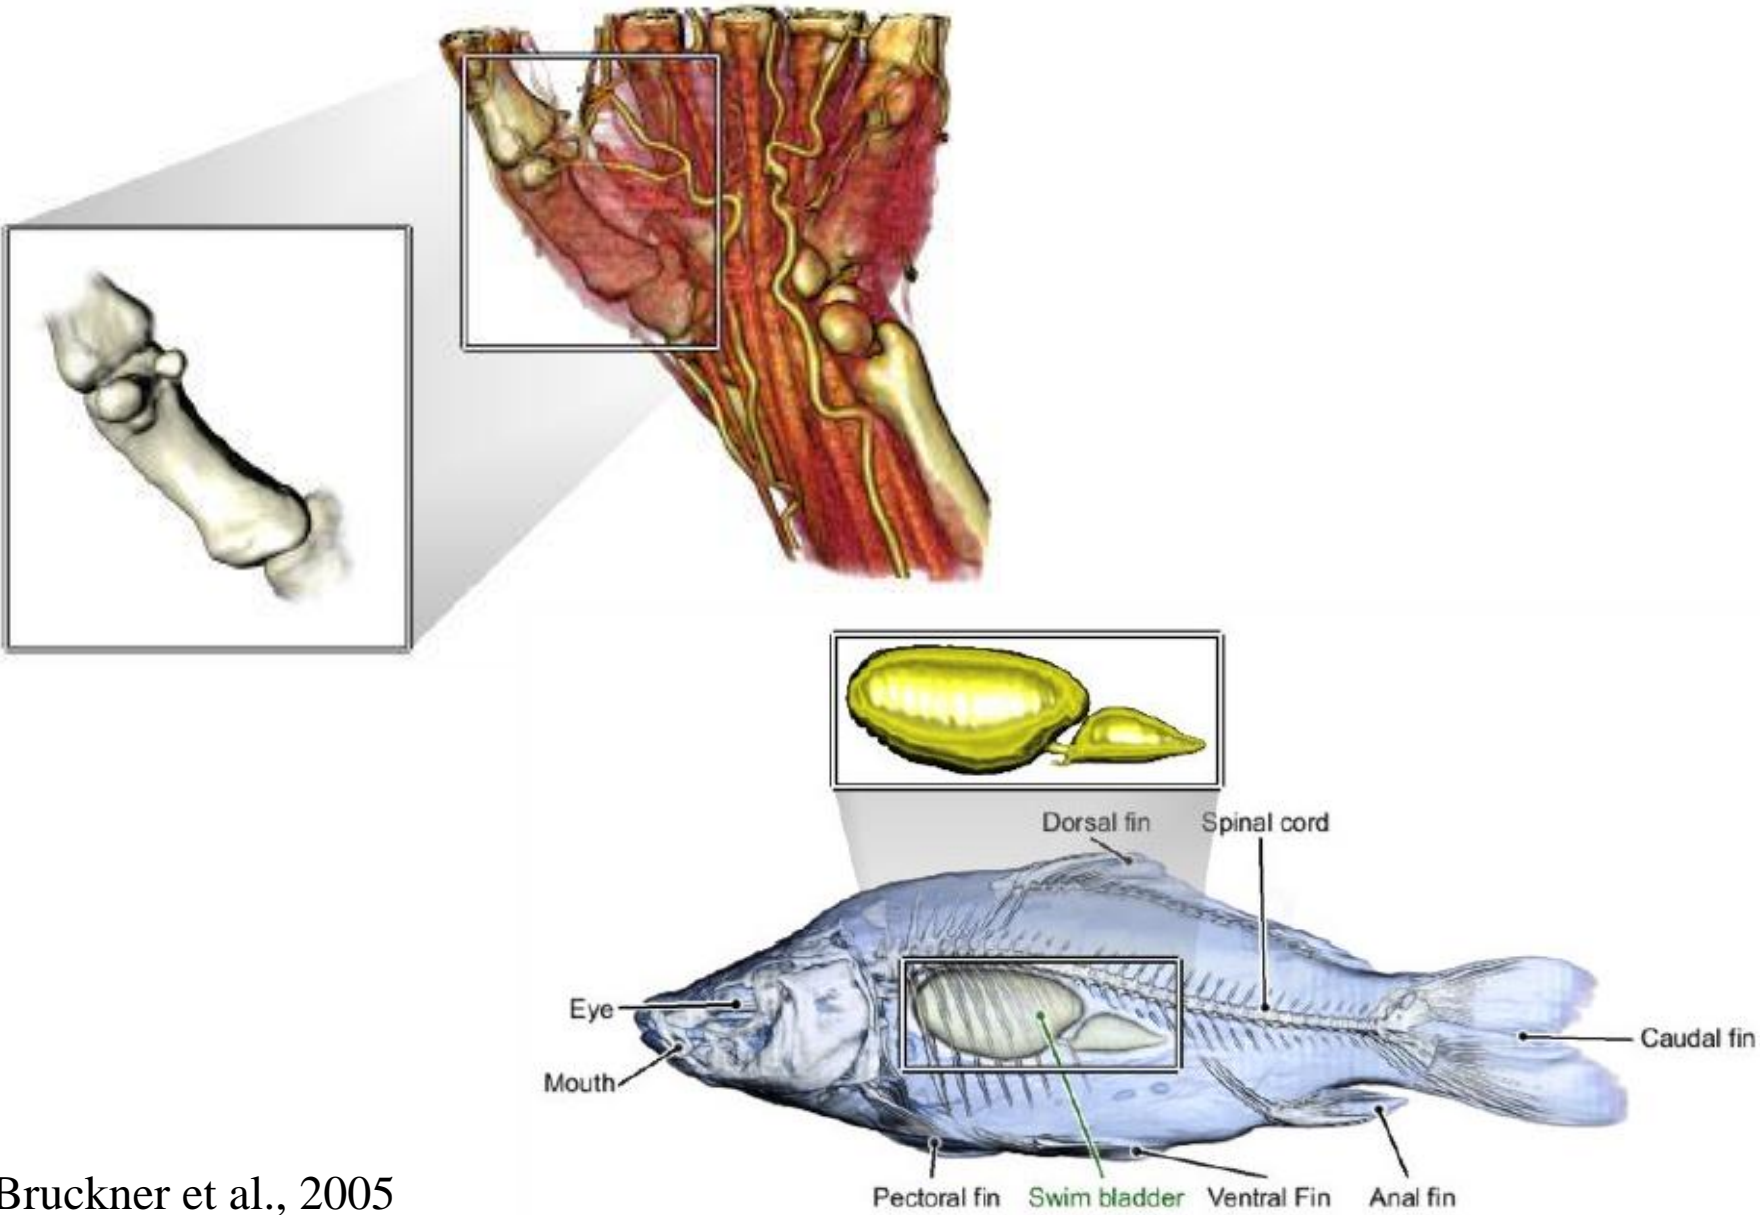



Labeling And Other Abstractions

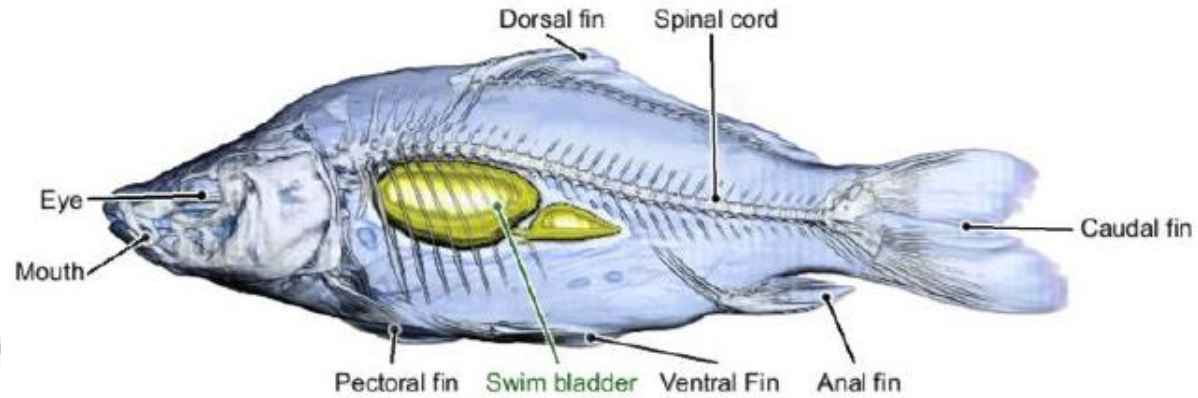

Displacement With Context



exploded views

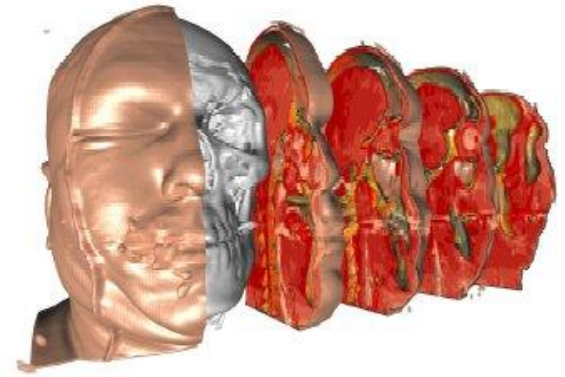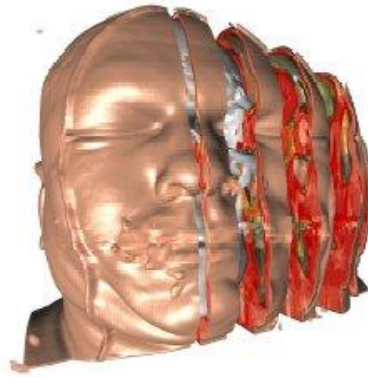


dynamic multi-volumes

Bruckner et al., 2005



volume splitting


Islam et al., 2004

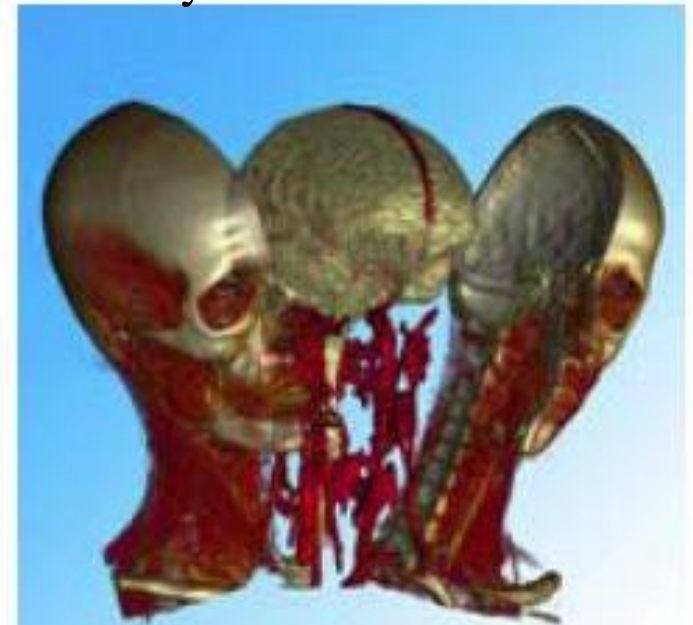



Grimm et al., 2004

Distortion Techniques

Ray deflectors:

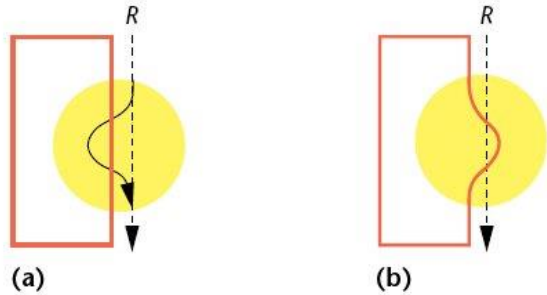

2 (a) A linear ray passing through the deflector field of gravity is pulled to the left. (b) The visual result. (c) An example of the 3D visual result after deflecting rays by a single translate deflector: Starting with a box, we add a bump. (d) Starting with an MRI head scan, we pull out the nose.

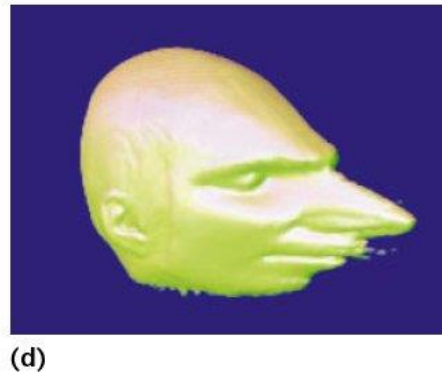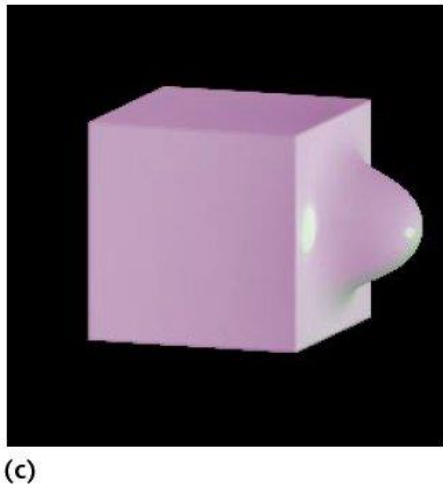

Explaining Differences Via Exaggerations

Caricature visualization



reference model

specimen


caricature

specimen




(a)

caricature

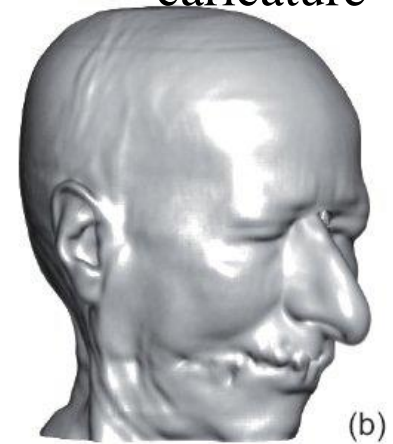


(b)

ref model

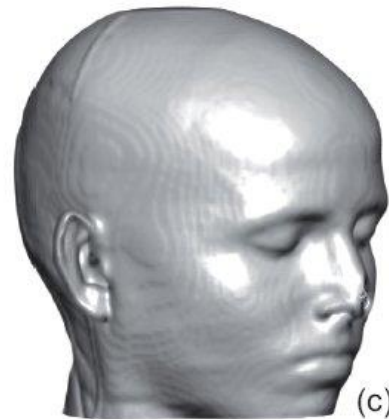

(c)

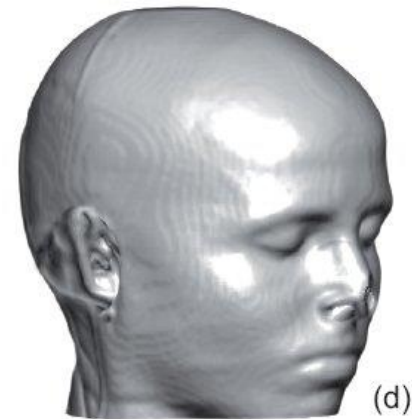


(d)



emphasize differences of the specimen
with the reference model by
exaggerating these differences

Fig. 10. A caricaturistic volume deformation. In (a) and (c) iso-surface renderings of the two datasets are shown. In (b) a caricature by volume deformation is shown using (c) as reference model. In (d) a caricature of (c) is shown using the features of (a) as reference model.

View Composition

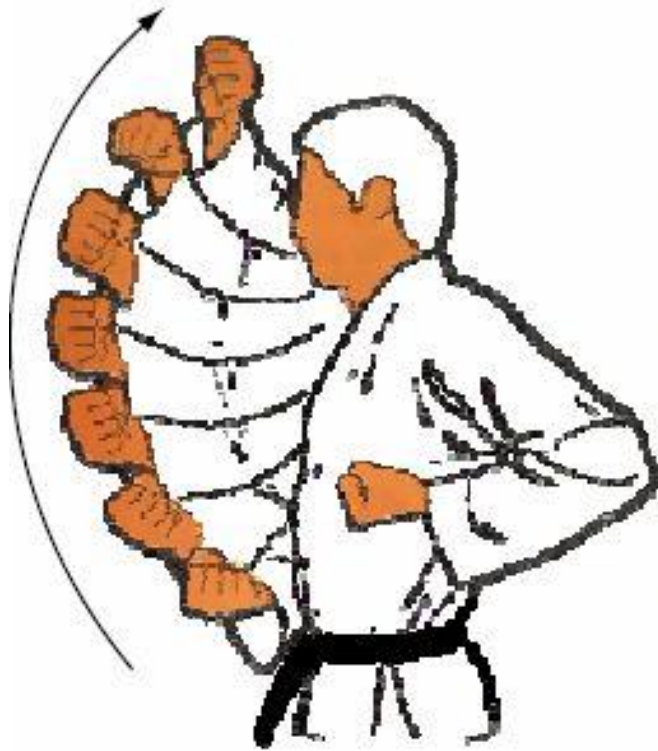


Rendering Mode Composition

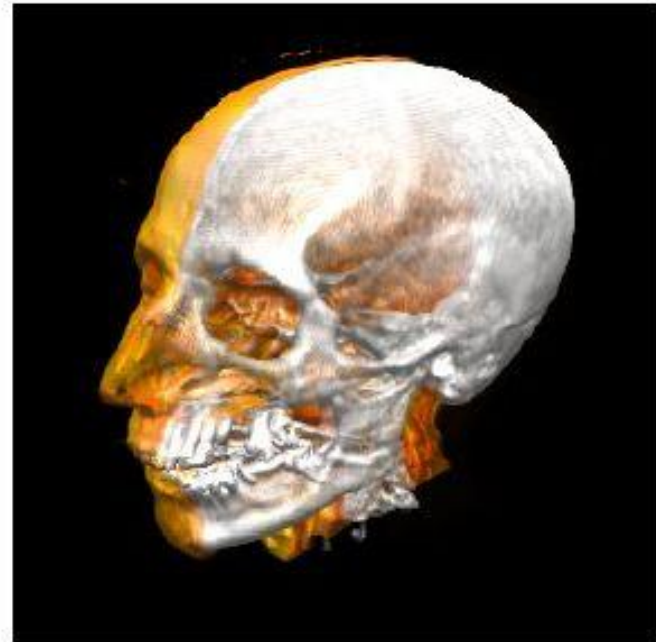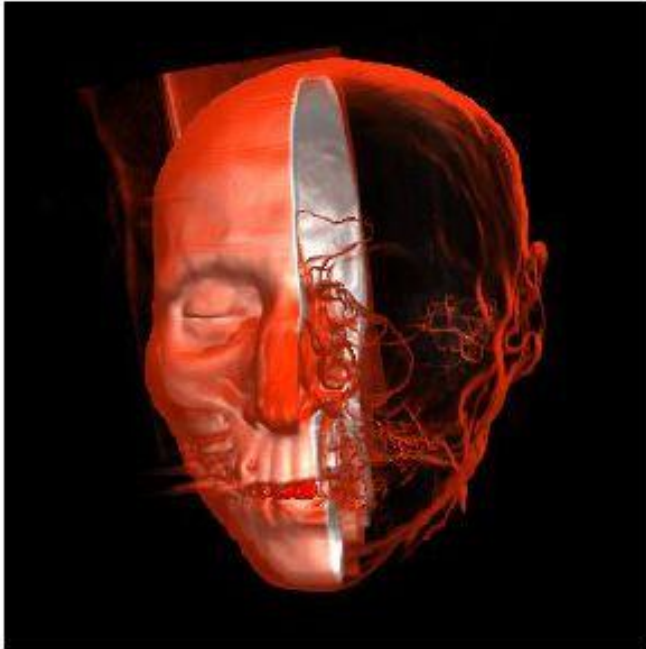


Time-Varying Data



The goal is to depict the time-varying behavior of the data in a single frame via illustrative techniques

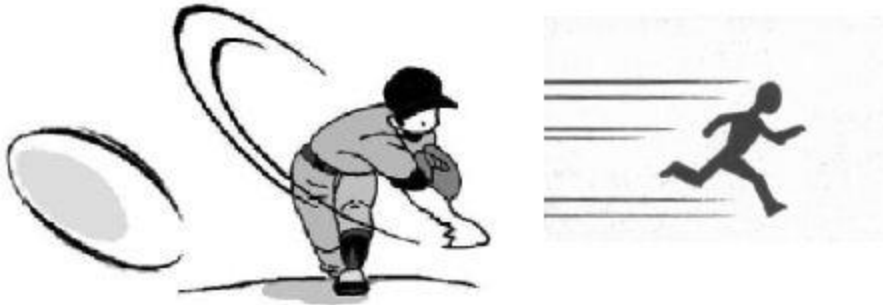

typical illustration metaphors

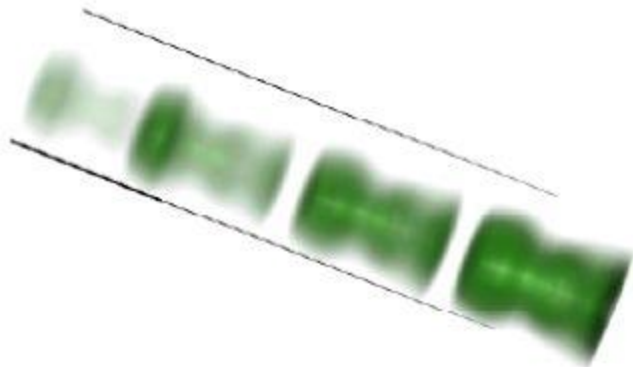

applied in visualization

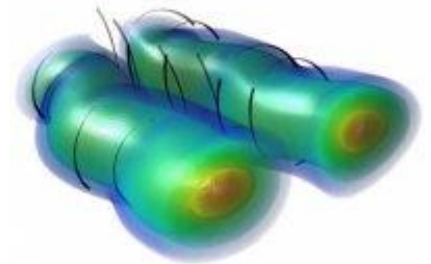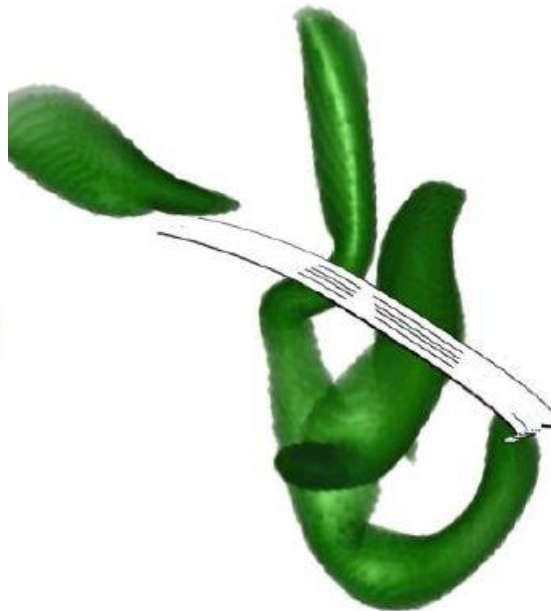

Time-Varying Data

Use ideas from flash photography to illustrate motion hints:

