

Objects and Classes

CSE160: Computer Science A: Honors

Paul Fodor

Stony Brook University


<http://www.cs.stonybrook.edu/~cse160>

Contents

- Motivating Problems: Complex objects and GUIs
- Classes, objects, object state and behavior
- Object-oriented Design
- Constructors
- Accessing fields and methods
- Static vs. Non-static
- Static Variables and Methods
- Default values for Class Fields
- Primitive Data Types and Object Types, Copying
- Garbage Collection
- Example classes in Java API: the Date class
- The Random class
- Visibility Modifiers and Accessor/Mutator Methods

Motivating Problems

- Develop a Graphical User Interface (GUI)
 - need of multiple object instances of classes

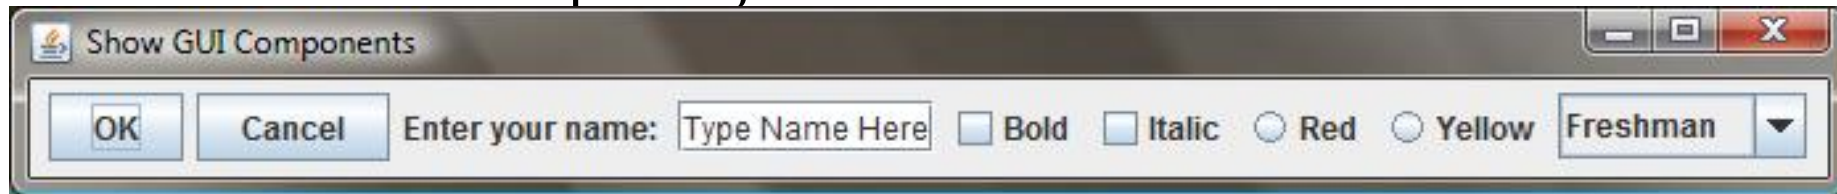

- 2 buttons
 - input fields
 - 2 check boxes
 - 2 radio/choice boxes
 - lists
- Relational databases:
 - several tuples of the same relation schema
 - Example: Person(firstName, lastName, Address, dateOfBirth)

Object-Oriented Programming Concepts

- An object represents an entity in the real world that can be distinctly identified from a **class/templates of objects with common properties**.
- An object has a unique **state** and **behavior**:
 - the state of an object consists of **a set of data fields (properties) with their current values**
 - the behavior of an object is defined by **a set of instance methods**

Classes

- In Java **classes** are templates that define objects of the same type
 - A Java class uses:
 - **non-static/instance variables** to define data fields
 - **non-static/instance methods** to define behaviors
 - A class provides a special type of methods called ***constructors*** which are invoked to construct objects from the class

Classes

```
class Circle {  
    /** The radius of this circle */  
    private double radius = 1.0;   
  
    /** Construct a circle object */  
    public Circle() {  
    }  
  
    /** Construct a circle object */  
    public Circle(double newRadius) {  
        radius = newRadius;  
    }  
  
    /** Return the area of this circle */  
    public double getArea()  
        return radius * radius * 3.14159;  
    }  
}
```

← Data field

← Constructors

← Method





Classes

```
public class TestCircle {  
  
    public static void main(String[] args) {  
  
        Circle c1 = new Circle();  
        Circle c2 = new Circle(5.0);  
  
        System.out.println( c1.getArea() );  
        System.out.println( c2.getArea() );  
  
    }  
  
}
```

Object-oriented Design

- The *Unified Modeling Language (UML)* is a general-purpose modeling language in the field of software engineering that is intended to provide a standard way to visualize the design of an object-oriented system.

UML Class Diagram

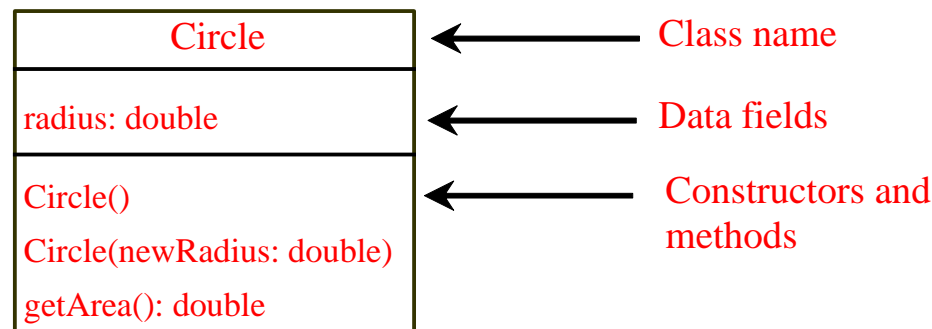

Constructors

- Constructors must have the same name as the class itself.
- Constructors do not have a return type—not even **void**.
- Constructors are invoked using the **new** operator when an object is created – they initialize objects to **reference variables**:

```
ClassName o = new ClassName ();
```

- Example:

```
Circle myCircle = new Circle(5.0);
```

- A class may be declared without constructors: a no-arg **default constructor** with an empty body is **implicitly** declared in the class

Accessing Objects

- Referencing the object's data:

objectRefVar.data

- Example: **myCircle.radius**

- Invoking the object's method:

objectRefVar.methodName(arguments)

- Example: **myCircle.getArea()**


Using classes

```
Circle myCircle = new Circle(5.0);
```

```
SCircle yourCircle = new Circle();
```

```
yourCircle.radius = 100;
```

Declare myCircle

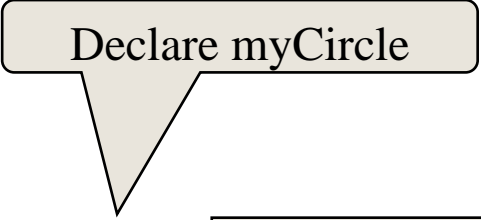

myCircle

null value




Using classes

```
Circle myCircle = new Circle(5.0);
```

```
Circle yourCircle = new Circle();
```

```
yourCircle.radius = 100;
```

myCircle null value

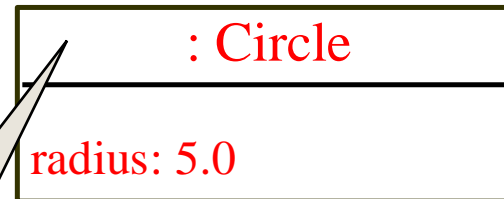

Create a circle

Using classes

```
Circle myCircle = new Circle(5.0);
```

```
Circle yourCircle = new Circle();
```

```
yourCircle.radius = 100;
```

Assign object reference
to myCircle

myCircle

reference value

: Circle

radius: 5.0


Using classes

```
Circle myCircle = new Circle(5.0);
```

```
Circle yourCircle = new Circle();
```

```
yourCircle.radius = 100;
```

myCircle reference value

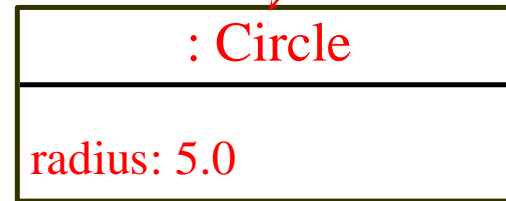

yourCircle null value

Declare yourCircle


Using classes

```
Circle myCircle = new Circle(5.0);
```

```
Circle yourCircle = new Circle();
```


```
yourCircle.radius = 100;
```

myCircle reference value

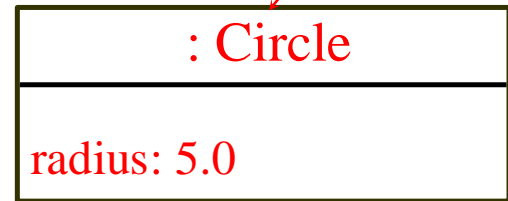

yourCircle null value

Create a new
Circle object

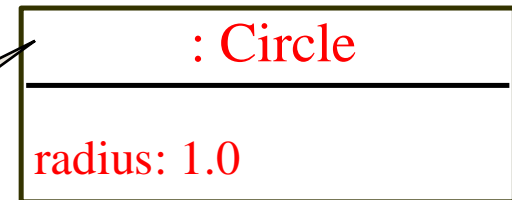


Using classes

```
Circle myCircle = new Circle(5.0);
```


```
Circle yourCircle = new Circle();
```

```
yourCircle.radius = 100;
```

myCircle reference value

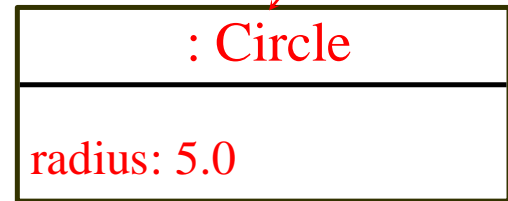

yourCircle reference value

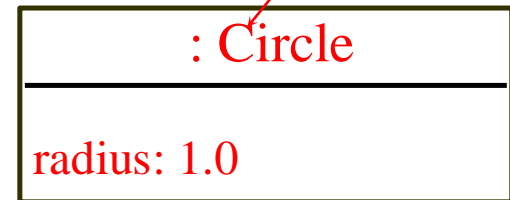

Assign object reference
to yourCircle


Using classes

```
Circle myCircle = new Circle(5.0);
```


```
Circle yourCircle = new Circle();
```

```
yourCircle.radius = 100;
```

myCircle reference value

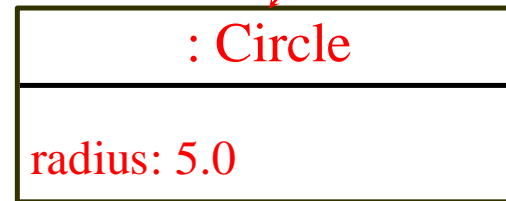

yourCircle reference value

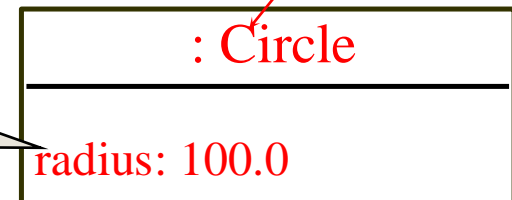

Change radius in
yourCircle

Static vs. Non-static variables

- Static variables and constants:
 - **global variables for the entire class: for all objects instances of this class**

```
static int count = 0;
```

```
static final double PI = 3.141592;
```


- Non-static/instance variables are data fields of objects:

```
System.out.println(myCircle.radius);
```

```
System.out.println(yourCircle.radius);
```

Static Variables, Constants and Methods

- Static variables are shared by all the instances of the class:

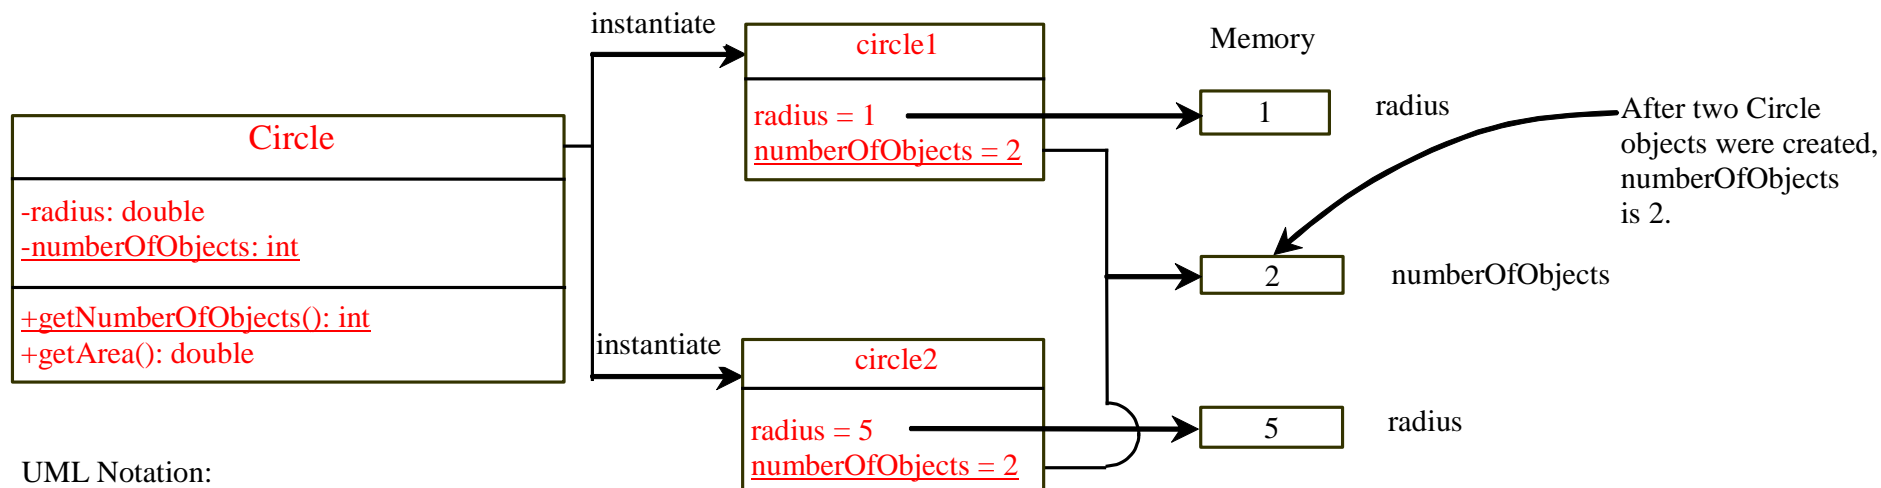

UML Notation:

- + : public variables or methods
- underline: static variables or methods

Static vs. Non-static methods

- Static methods:
 - Shared by all the instances of the class - not tied to a specific object:

```
double d = Math.pow(3, 2);
```

- Non-static/instance methods must be invoked from an object
instance of the class:


```
double d1 = myCircle.getArea();
```

```
double d2 = yourCircle.getArea();
```

No Default values for local variables

Java assigns no default value to a **local variable** inside a method.

```
public class Test {  
    public static void main(String[] args) {  
        int x; // x has no default value  
        String y; // y has no default value  
        System.out.println("x is " + x);  
        System.out.println("y is " + y);  
    }  
}
```



Compilation errors: the variables are not initialized

Default values for Data Fields

- Data fields have default values


- Example:

```
public class Student {
    String name; // name has default value null
    int age; // age has default value 0
    boolean isScienceMajor; // isScienceMajor has default value false
    char gender; // c has default value '\u0000'
}



public class Test {
    public static void main(String[] args) {
        Student student = new Student();
        System.out.println("name? " + student.name); // null
        System.out.println("age? " + student.age); // 0
        System.out.println("isScienceMajor? " + student.isScienceMajor); // false
        System.out.println("gender? " + student.gender); //
    }
}
```

Note: If a data field of a reference type does not reference any object, the data field holds a special literal value: **null**.

Differences between Variables of Primitive Data Types and Object Types

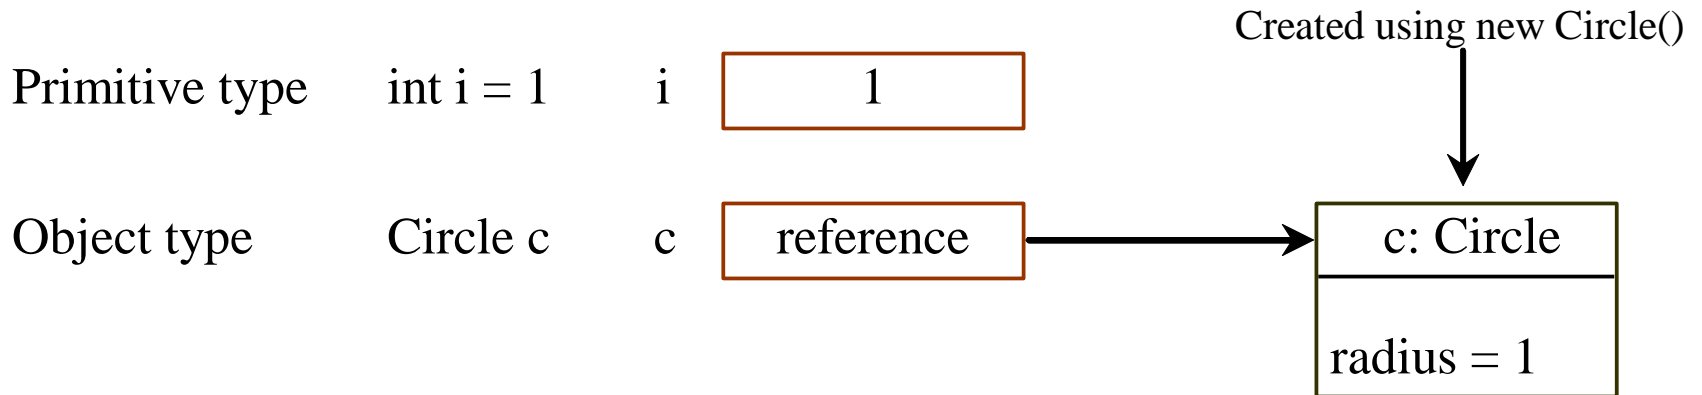

Copying Variables of Primitive Data Types and Object Types

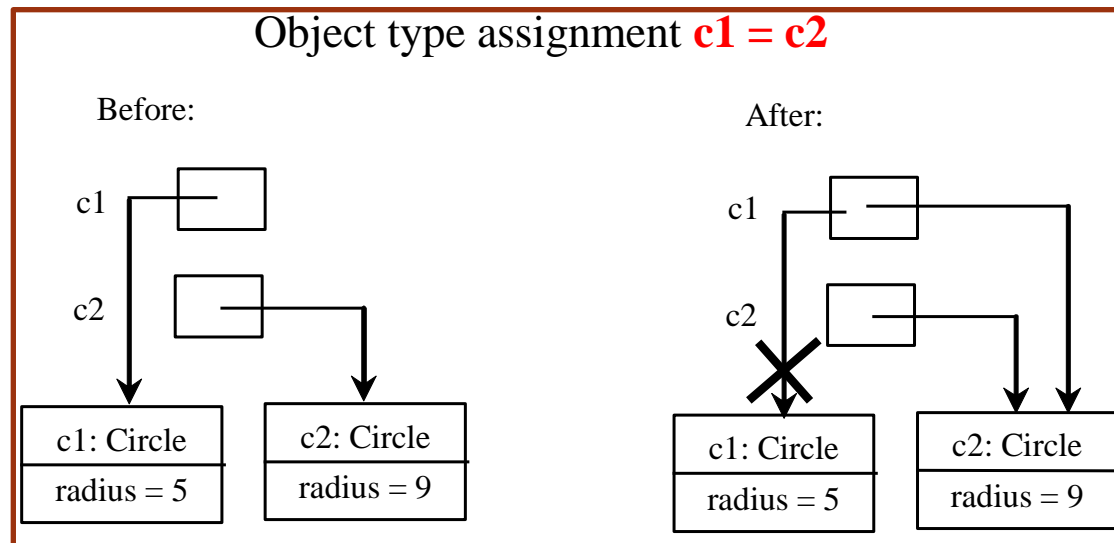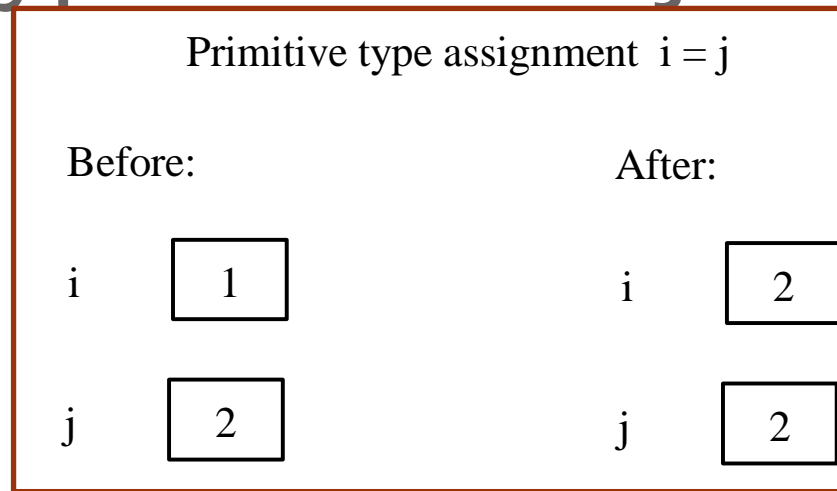


Garbage Collection

- The object previously referenced by `c1` is no longer referenced, it is called *garbage*
- Garbage is automatically collected by the JVM, a process called *garbage collection*
 - In older languages, like C and C++, one had to **explicitly deallocate/delete unused data/objects**

Example classes in Java: the Date class

Java provides a system-independent encapsulation of date and time in the java.util.Date class.

The toString method returns the date and time as a string

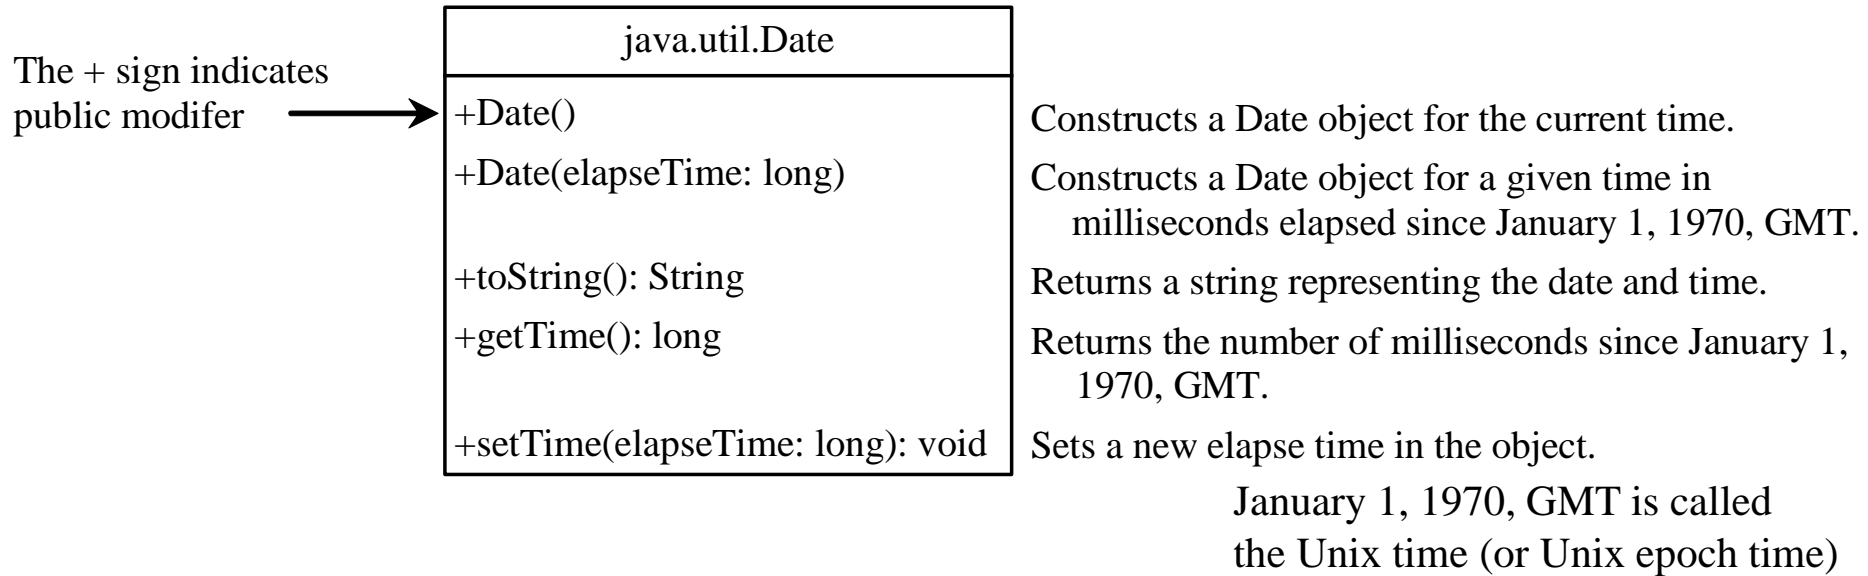

```
java.util.Date date = new java.util.Date();  
System.out.println(date.toString());
```

The Random class

java.util.Random

java.util.Random	
+Random()	Constructs a Random object with the current time as its seed.
+Random(seed: long)	Constructs a Random object with a specified seed.
+nextInt(): int	Returns a random int value.
+nextInt(n: int): int	Returns a random int value between 0 and n (exclusive).
+nextLong(): long	Returns a random long value.
+nextDouble(): double	Returns a random double value between 0.0 and 1.0 (exclusive).
+nextFloat(): float	Returns a random float value between 0.0F and 1.0F (exclusive).
+nextBoolean(): boolean	Returns a random boolean value.

```
Random random1 = new Random(3) ;
```

```
for (int i = 0; i < 10; i++)
```

```
    System.out.print(random1.nextInt(1000) + " ");
```

734 660 210 581 128 202 549 564 459 961

Visibility Modifiers and

Accessor/Mutator Methods

- By default, the class, variable, or method can be accessed by any class in the same package.
 - `public` (+ in UML)
The class, data, or method is visible to any class in any package.
 - `private` (- in UML)
The data or methods can be accessed only by the declaring class - To protect data!
- **getField (accessors) and setField (mutators) methods are used to read and modify private properties.**

Packages and modifiers

- The **private** modifier restricts access to **within a class**
- The default modifier restricts access to **within a package**
- **public** – unrestricted access

package p1;

```
public class C1 {  
    public int x;  
    int y;  
    private int z;  
  
    public void m1() {  
    }  
    void m2() {  
    }  
    private void m3() {  
    }  
}
```

```
public class C2 {  
    void aMethod() {  
        C1 o = new C1();  
        can access o.x;  
        can access o.y;  
        cannot access o.z;  
  
        can invoke o.m1();  
        can invoke o.m2();  
        cannot invoke o.m3();  
    }  
}
```

package p2;

```
public class C3 {  
    void aMethod() {  
        p1.C1 o = new p1.C1();  
        can access o.x;  
        cannot access o.y;  
        cannot access o.z;  
  
        can invoke o.m1();  
        cannot invoke o.m2();  
        cannot invoke o.m3();  
    }  
}
```

package p1;

```
class C1 {  
    ...  
}
```


```
public class C2 {  
    can access C1  
}
```

package p2;

```
public class C3 {  
    cannot access C1;  
    can access C2;  
}
```

UML: Data Field Encapsulation

The - sign indicates private modifier

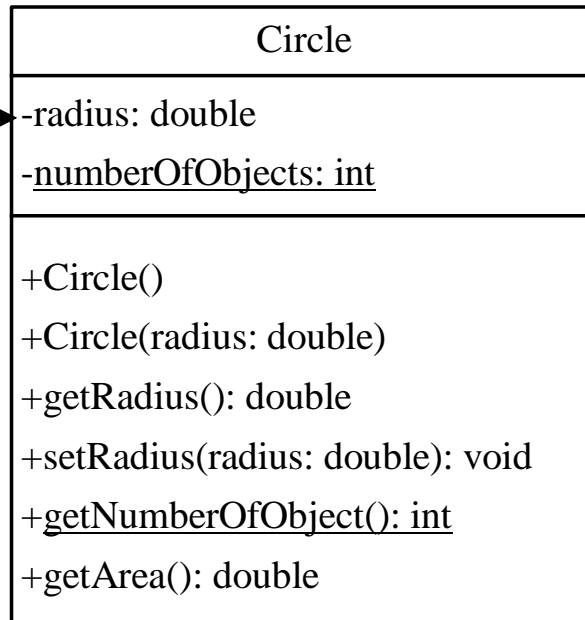

The radius of this circle (default: 1.0).

The number of circle objects created.

Constructs a default circle object.

Constructs a circle object with the specified radius.

Returns the radius of this circle.

Sets a new radius for this circle.

Returns the number of circle objects created.

Returns the area of this circle.

Array of Objects

- An **array of objects** is an *array of reference variables* (like the multi-dimensional arrays seen before)

```
Circle[] circleArray = new Circle[10];  
circleArray[0] = new Circle();  
circleArray[1] = new Circle(5);  
...
```

